

On the Feasibility of Wireless Shadowing Correlation Models

Sebastian S. Szyszkowicz, *Student Member, IEEE*, Halim Yanikomeroglu, *Member, IEEE*,
John S. Thompson, *Member, IEEE*

Abstract—There is emerging interest in more detailed models for wireless shadowing, which may include non-constant shadowing variance, non-lognormal shadowing, and, most importantly, correlation between paths; we focus on this last aspect. This paper offers a structured synthesis of the existing literature on auto- and cross-correlation in wireless shadowing, and attempts to fill existing gaps in the analysis of correlation models. We make a survey of these models, and argue, as has previously been observed, that certain models are not mathematically feasible, which may lead to problems in simulations or analysis. We then state some theorems that test whether the models are positive semidefinite, the central necessary condition for feasibility, and evaluate the existing models accordingly. Additionally, we evaluate the models according to their physical plausibility, which leads us to choose one model among many as arguably the best one in existence so far.

This paper should be useful as a guide on how to implement shadowing correlation in one's work, how to choose an appropriate correlation model, and how to modify existing models or create new models so that they fulfill mathematical feasibility.

Index Terms—wireless channel modeling, wireless shadowing, correlation

I. INTRODUCTION

CORRELATION in wireless shadowing is a significant step in obtaining more realistic channel propagation models. This paper proposes to discuss in detail the existing literature on shadowing correlation and the existing correlation models, focusing on evaluating the mathematical feasibility of these models, while also making comments on their physical plausibility. The purpose of this paper is to facilitate the choice and implementation of correlation models in works that involve shadowing.

A. Motivation

Recent work on various aspects of wireless communications indicates a wide gap between results obtained assuming independent shadowing paths and between those that introduce

Manuscript received February 16, 2010, revised May 31, 2010, accepted August 24, 2010.

Copyright ©2010 IEEE. Personal use of this material is permitted. However, permission to use this material for any other purposes must be obtained from the IEEE by sending a request to pubs-permissions@ieee.org.

This work was supported in part by a PGS D from the National Sciences and Engineering Research Council (NSERC) of Canada.

S. S. Szyszkowicz is with the Broadband Communications and Wireless Systems (BCWS) Centre, Dept. of Systems and Computer Engineering, Carleton University, Ottawa, ON K1S 5B6, Canada (phone: +1 613 520 2600 x1948, fax: +1 613-520-5727, e-mail: sz@sce.carleton.ca).

H. Yanikomeroglu is also with BCWS (e-mail: halim@sce.carleton.ca).

J. S. Thompson is with the School of Engineering and Electronics, University of Edinburgh, Edinburgh EH8 9YL, U.K. (e-mail: John.Thompson@ed.ac.uk).

correlation in shadowing propagation models [1]–[5]. Older works show that shadowing correlation significantly affects handover behaviour [6]–[9], interference power [10]–[14] and consequently system performance [15]–[17], and the performance of macrodiversity schemes [10], [18]–[23]. Furthermore, shadowing in dB has been measured [18], [24]–[39] to have significant correlation in various scenarios. Because of these two facts we believe that the general wireless community is becoming convinced of the importance of modeling correlation in shadowing [2]–[5], [12], [23], [40]–[49]. This is part of a more general trend suggesting that most propagation models used in simulation (and analysis) work today are sometimes too simplistic and may lead to misleading results [50]. Shadowing correlation can also be positively exploited in some algorithms or protocols, e.g., for wireless positioning [2], [5], [51], cognitive radio and spectrum sensing [49], [52]–[54], or neighbour discovery [48] applications.

Meanwhile, there already exist several models for shadowing correlation. The questions of which model to use and how to simulate channel realisations accordingly are essential for every researcher wanting to implement correlation. However, because correlation models are based on estimating a complex phenomenon from a small data sample, they may lose some properties with respect to reality: in particular, some estimated models may not be mathematically feasible, and thus it would be impossible, in certain cases, to generate Monte Carlo samples from them.

In [45], it is deplored that this problem is rarely taken into account; yet it has received some attention in [6], [7], [45], [46], [55]–[57]. It has previously been addressed [43], [57], [58] by modifying particular correlation matrices slightly so that they become feasible (specifically, positive semidefinite (*psd*) for lognormal shadowing). However, we prefer to address the problem at its root: let us use only such correlation models that will *always* produce *psd* correlation matrices, as suggested in [6], [45], [56]. This has several advantages:

- 1) A faster implementation time, as no provision for correcting non-*psd* matrices needs to be made.
- 2) Probably a faster execution time for every realisation, as no decisions or corrections need to be made during the Monte Carlo simulation.
- 3) Mathematical consistency and elegance: if a model is feasible, it is safe for mathematical analysis [9]–[11], [13], [21], [22], [44], [52], [59]–[64].

If we begin with a set of independent random variables, and construct correlated shadowing variables by combining

them in some way, we can always calculate their correlation structure. However, the inverse operation cannot always be performed: there does not always exist a construction to obtain a desired correlation structure. Those that cannot be constructed are termed non-feasible.

B. Mathematical Tools

Some mathematical definitions and properties will be necessary in this paper. All algebraic operations are taken over the \mathbb{R} field.

Definition 1. A square matrix $\mathbf{A}_{N \times N}$ is positive definite if for every column vector $\mathbf{x} \in \mathbb{R}^N \setminus \mathbf{0}$, $\mathbf{x}^T \mathbf{A} \mathbf{x} > 0$ [65, p.82 Def. 3.1.1.xvii].

Definition 2. A square matrix $\mathbf{A}_{N \times N}$ is positive semidefinite (psd) if for every column vector $\mathbf{x} \in \mathbb{R}^N$, $\mathbf{x}^T \mathbf{A} \mathbf{x} \geq 0$ [65, p.82 Def. 3.1.1.xv].

Definition 3. The Hadamard (also called Schur) product of two $M \times N$ matrices \mathbf{A} with entries $a_{i,j}$ and \mathbf{B} with entries $b_{i,j}$, is a $M \times N$ matrix $\mathbf{C} = \mathbf{A} \circ \mathbf{B}$ with entries $c_{i,j}$, such that the matrix entries are multiplied element-wise: $c_{i,j} = a_{i,j} b_{i,j}$ [65, p.252 Eq. 7.3.1].

Property 1 (Schur Product Theorem). If two $N \times N$ matrices \mathbf{A} and \mathbf{B} are both psd, then their Hadamard product $\mathbf{C} = \mathbf{A} \circ \mathbf{B}$ is also psd [65, p.335 Fact 8.16.8].

Definition 4. The Kronecker (also called Zehfuss) product of a $M \times N$ matrix \mathbf{A} with entries $a_{i,j}$ and a $K \times L$ matrix \mathbf{B} , is a $MK \times NL$ matrix $\mathbf{C} = \mathbf{A} \otimes \mathbf{B}$ with $M \times N$ block entries $a_{i,j} \mathbf{B}$ [65, p.248 Def. 7.1.2].

Property 2. If \mathbf{A} and \mathbf{B} are both psd, then so is $\mathbf{C} = \mathbf{A} \otimes \mathbf{B}$ [65, p.254 Fact 7.4.15].

Definition 5. An even function $f(t)$ is said to be positive definite if and only if for any N , for any t_1, \dots, t_N on \mathbb{R}^+ , the matrix with entries $a_{i,j} = f(|t_i - t_j|)$ is psd. This can be directly derived from [66, p.58 Eq. 1.29] and Definition 2.

Property 3 (Bochner's Theorem). A continuous even function $f(\tau)$ is positive definite if and only if there exists a non-decreasing bounded function $F(\omega)$, $\omega \in \mathbb{R}^+$ such that [66, p.92 Eq. 2.53]

$$f(\tau) = \int_0^\infty \cos \omega \tau dF(\omega). \quad (1)$$

Property 4. Every covariance matrix is necessarily psd¹ and symmetric [66, p.15 Eq. 0.36].

Property 5 (Pólya's Theorem). A bounded even function $f(\tau)$ with $f(\infty) = 0$ that is concave (up) on $[0, \infty)$ is necessarily positive definite [66, p.136]. (The converse is not true.)

C. Structure of this Paper

In Section II, we discuss the different types of physical situations that lead us to discuss correlation in shadowing,

¹Reference [56] says “positive definite”, but this is too restrictive; whereas [66] also says “positive definite”, but this is a difference in nomenclature, and clearly psd is meant.

before focusing on auto- and cross-correlation. In Section III, we define correlation in general mathematical terms. In Section IV, we define positive-semidefiniteness, which is the primary property to determine feasibility, and give some indications on how this property can be proved. In Section V, we discuss why models derived from real-world measurements may nevertheless prove unfeasible. In Section VI, we make a comprehensive study of the correlation models in literature, and summarise these models' properties in Table I. In Section VII, we impose further conditions on correlation models, by talking about their physical plausibility. These physical properties are also summarised in Table I, which allows us to formulate a best model that meets both mathematical and physical criteria. In Section VIII, we discuss the relationship between feasibility and positive-semidefiniteness, in the cases of both lognormal and non-lognormal shadowing, and discuss how to generate correlated jointly lognormal shadowing. We conclude in Section IX with practical guidelines for using shadowing correlation models in one's work.

This paper represents a synthesis of existing knowledge and some new contributions. As such, all non-original statements are given appropriate references.

II. TYPES OF CORRELATION

In wireless communications, shadowing is a phenomenon that corresponds to a random variability of the power gain over a (directed) propagation path. A transmitting node radiates a radio signal toward a receiver node. The receiver may receive a desired signal, or an interfering one. Shadowing represents the variability of the logarithm of the received power around its expected value: we denote this quantity S , with $\text{VAR}\{S\} < \infty$. The small-scale effect of fading has been removed in the spatial dimension by averaging over a local region [45] of about 50 wavelengths [56], [62], that is, approximately 8 – 34 meters for classic cellular channels [18], [24], [25], [27], [29], [37], [38].

Consider two directed paths, $\overrightarrow{X_1 Y_1}$ and $\overrightarrow{X_2 Y_2}$, with shadowing values S_1 and S_2 respectively. Their correlation coefficient is defined as

$$\rho_{1,2} = \frac{\mathbb{E}\{S_1 S_2\}}{\sqrt{\text{VAR}\{S_1\} \text{VAR}\{S_2\}}}. \quad (2)$$

In general, correlation may exist for any set of four points $X_1 \neq Y_1, X_2 \neq Y_2$. However, we usually examine correlation under more specific scenarios.

A. Scenarios

Shadowing correlation can occur in various particular scenarios, specifically in peer-to-peer links [2], [67], [68], in indoor, cross-floor, and indoor-outdoor links [27], [30], and in satellite-ground communications [31], [69]–[71]. It should be noted however that most of the literature on correlation in shadowing is driven by cellular (usually urban) scenarios, where the base-station/mobile and uplink/downlink dualities apply. In cellular communications, the distinction between auto-correlation and cross-correlation applies [45]. Cross-sector correlation has also been considered [72].

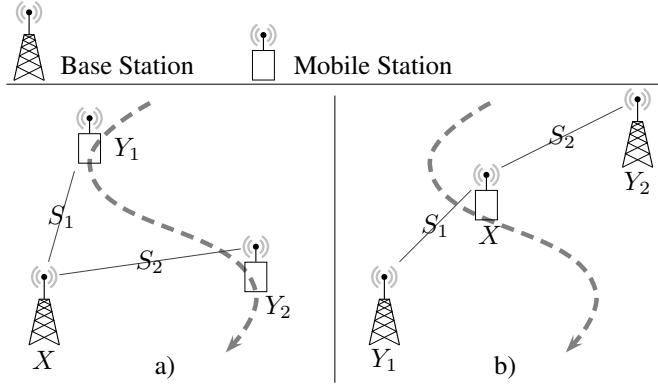


Fig. 1. a) Shadowing auto-correlation for a mobile $Y(t)$, b) Shadowing cross-correlation for a mobile X .

An important consideration for satellite and indoor scenarios is that propagation is usually considered in three, not just two, Cartesian dimensions. In this work we will analyse two-dimensional channel models only, though the analysis usually translates easily to three dimensions.

B. Auto-Correlation

Also called serial correlation [73], this model considers a transmitting base-station X , received by the same moving mobile Y at two moments in time, t_1 and t_2 , and at distinct locations $Y_1 = Y(t_1)$ and $Y_2 = Y(t_2)$. Alternatively, the signal may be received by two distinct mobiles, Y_1 and Y_2 , at the same moment in time. These scenarios may also be reversed to consider the uplink: either the same mobile transmits to the same base station X at moments t_1 and t_2 at locations Y_1 and Y_2 respectively; or the same base station X receives from two distinct mobiles simultaneously at locations Y_1 and Y_2 . All these four cases can come under the category of auto-correlation and are illustrated in Figure 1 a).

C. Cross-Correlation

This is the central object of our study. Cross-correlation, or site-to-site correlation [73], considers two transmitting base stations, Y_1 and Y_2 , that transmit to a common mobile receiver X . Alternatively, cross-correlation can consider a mobile transmitter X whose signal is picked up by two base stations, Y_1 and Y_2 . These are illustrated in Figure 1 b).

Now, observing the previous section on auto-correlation and the systematic nomenclature we gave to nodes (X a common node, and Y_1 and Y_2 nodes on two separate links), we may abstract from the nature of these nodes and the link direction, and conclude that auto-correlation and cross-correlation are very similar in the mathematical sense and can be studied in the same manner. Furthermore, we see in [46], [74] how an auto-correlation model can be used to model cross-correlation also. We therefore assume that X is the common node to all paths, which we locate at the origin for simplicity, and all links are between X and the points Y_i .

D. Generalised Correlation

If we allow total freedom for the positions of the two paths, then the correlation model becomes more complex; in fact, it becomes a function of up to eight free variables (four free positions on a two dimensional plane).

We will not study this type of correlation for two reasons: first, because of its increased complexity; and second, because the methods given in literature begin with an explicit construction of the shadowing realisations, and hence it is not necessary to study their feasibility: they are always feasible. Contrast this with the correlation models studied here. In Section VIII-A, it is necessary to factorise a matrix, which is not always possible, and thus the method is implicit and feasibility must be studied.

Such methods rely of generating shadowing maps [42] in some way. Three algorithms for doing so are the Sum-of-Sinusoids (SoS) algorithm [67], the Network Shadowing (NeSh) method [2], [3], [44], [68], and the over-obstacle multiple-edge diffraction model [75].

E. Time-Correlation

Time-correlation is different in that it only considers one path \overrightarrow{XY} , but looks at the correlation between the shadowing at various moments in time. The shadowing can thus be represented as a random process $S(t)$ [8], [64]. The feasibility of the model is a simple problem here, because the problem simply evolves in one dimension: time. The correlation model is then specified by the auto-correlation function of $S(t)$, and the model will be *psd* if and only if the auto-correlation function is *psd*. We are not aware of any measurements of correlation in time only, and it is not evident if shadowing changes significantly over a fixed path.

It should be understood that shadowing evolution in time should (like in space) have fast fading removed through time-averaging of some duration.

F. Uplink-Downlink Correlation

Consider the path \overrightarrow{XY} , and then its return path \overrightarrow{YX} . By channel symmetry, one might conclude that the shadowing experienced in both directions is identical, which would correspond to a correlation coefficient of $\rho_{ud} = 1$. In practice, measurements indicate a high degree of correlation: $\rho_{ud} \geq 0.66$ [35]. From these measurements, [76] assumed $\rho_{ud} = 0.7$. Furthermore, [50] demonstrated asymmetry but positive correlation in link connectivity, which can be interpreted as unequal but correlated shadowing in each direction.

III. SHADOWING MODEL DESCRIPTION

Auto- and cross-correlation models can be generically described as follows. Consider N points Y_1, \dots, Y_N located on a plane at positions $\vec{r}_1, \dots, \vec{r}_N$ with $\vec{r}_i \in \mathbb{R}^2 \setminus \{0\}$. We will write $r_i = \|\vec{r}_i\|$. We assume, without loss of generality, that the common point X is located at the origin, and thus $\vec{r}_i = \overrightarrow{XY_i}$. Consider S_i the logarithm of the power attenuation due to shadowing on each path \vec{r}_i (see Figure 2). We have $\mathbb{E}\{S_i\} = 0$. We will for the moment not commit to any particular shadowing distribution. We require only the condition that $\text{VAR}\{S_i\} < \infty$.

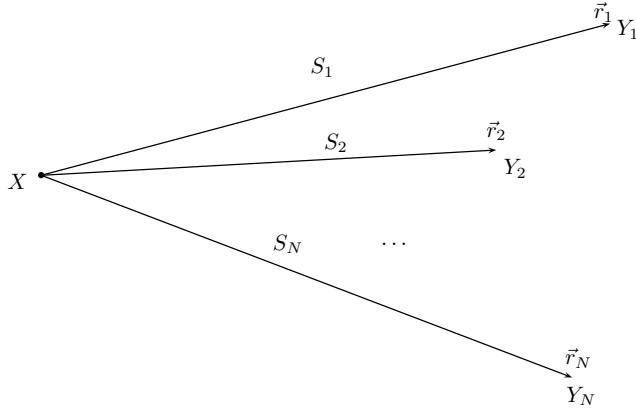


Fig. 2. Generic geometry of shadowing auto- and cross-correlation.

The shadowing log-variance can most generally be characterised as

$$\sigma_i^2 = \text{VAR}\{S_i\} = \sigma_s^2(\vec{r}_i), \quad (3)$$

though in an isotropic medium it will simply be a function of distance: $\text{VAR}\{S_i\} = \sigma_s^2(r_i)$. Usually, shadowing log-variance is considered as constant after some distance. [1]

The pairwise correlation coefficients necessarily exist (by the Cauchy–Schwarz inequality) and can be defined as

$$\begin{aligned} \rho_{i,j} &= \mathbb{E}\{S_i S_j\}/\sigma_i \sigma_j = h(\vec{r}_i, \vec{r}_j), \quad i \neq j, \\ \rho_{i,i} &= 1. \end{aligned} \quad (4)$$

We then have the properties:

- 1) $-1 \leq h(\vec{r}_i, \vec{r}_j) \leq 1$ and
- 2) $h(\vec{r}_i, \vec{r}_j) = h(\vec{r}_j, \vec{r}_i)$.

A shadowing model that includes pairwise correlation can most generally be defined by the pair of functions $(\sigma_s^2(\vec{r}), h(\vec{r}_1, \vec{r}_2))$.

Now the correlation matrix of $\mathbf{S} = [S_1, \dots, S_N]$ is

$$\mathbf{K} = \begin{bmatrix} \sigma_1^2 & \sigma_1 \sigma_2 \rho_{1,2} & \cdots & \sigma_1 \sigma_N \rho_{1,N} \\ \sigma_1 \sigma_2 \rho_{1,2} & \sigma_2^2 & \cdots & \sigma_2 \sigma_N \rho_{2,N} \\ \vdots & \vdots & \ddots & \vdots \\ \sigma_1 \sigma_N \rho_{1,N} & \sigma_2 \sigma_N \rho_{2,N} & \cdots & \sigma_N^2 \end{bmatrix}. \quad (5)$$

IV. POSITIVE-SEMIDEFINITENESS OF CORRELATION MODELS

From Property 4, for \mathbf{K} to be a valid covariance matrix of \mathbf{S} , it is a necessary (but not always sufficient, as seen in Section VIII) that \mathbf{K} be *psd* (\mathbf{K} is already symmetric by construction).

Definition 6. We say that a shadowing model $(\sigma_s^2(\vec{r}), h(\vec{r}_1, \vec{r}_2))$ is *psd* if $\forall N, \forall [\vec{r}_1, \dots, \vec{r}_N] \in (\mathbb{R}^2 \setminus \{0\})^N$, the correlation matrix \mathbf{K} is always *psd*.

A. Models with Variable Shadowing Variance

Theorem 1. If a model $(1, h(\vec{r}_1, \vec{r}_2))$ with constant log-variance 1 is *psd*, then for any $\sigma_s^2(\vec{r})$, the model $(\sigma_s^2(\vec{r}), h(\vec{r}_1, \vec{r}_2))$ is also *psd*. Conversely, if the model $(\sigma_s^2(\vec{r}), h(\vec{r}_1, \vec{r}_2))$ is *psd* and $\sigma_s^2(\vec{r}) > 0 \forall \vec{r} \in \mathbb{R}^2 \setminus \{0\}$, then the model $(1, h(\vec{r}_1, \vec{r}_2))$ with constant log-variance 1 is *psd*.

Proof: Consider N shadowing paths $\vec{r}_i \in \mathbb{R}^2 \setminus \{0\}$ and a shadowing model $(\sigma_s^2(\vec{r}), h(\vec{r}_1, \vec{r}_2))$ where $(1, h(\vec{r}_1, \vec{r}_2))$ is a *psd* shadowing model. We call \mathbf{H} the $N \times N$ matrix with entries $h(\vec{r}_i, \vec{r}_j)$, and \mathbf{s} the column vector with entries $\sigma_s(\vec{r}_i)$. Then the correlation matrix of \mathbf{S} can be written

$$\mathbf{K} = (\mathbf{s} \mathbf{s}^T) \circ \mathbf{H}. \quad (6)$$

Now the matrix $\mathbf{s} \mathbf{s}^T$ is *psd* as can be seen from Definition 2: $\mathbf{x}^T (\mathbf{s} \mathbf{s}^T) \mathbf{x} = (\mathbf{x}^T \mathbf{s})^2 \geq 0 \forall \mathbf{x} \in \mathbb{R}^N$. Also, since $(1, h(\vec{r}_1, \vec{r}_2))$ is *psd*, it follows that \mathbf{H} is *psd*. Applying the Schur Product Theorem, we find that \mathbf{K} is always *psd*, which implies that the model $(\sigma_s^2(\vec{r}), h(\vec{r}_1, \vec{r}_2))$ is *psd*.

To prove the converse, we write

$$\mathbf{H} = (\mathbf{z} \mathbf{z}^T) \circ \mathbf{K}, \quad (7)$$

where \mathbf{z} is the column vector with entries $\sigma_s^{-1}(\vec{r}_i)$, and the proof is analogous. Of course, here the additional requirement that $\sigma_s(\vec{r}) \neq 0, \forall \vec{r} \in \mathbb{R}^2 \setminus \{0\}$ is required. ■

Thus in order to study the positive-semidefiniteness of a shadowing model, it is sufficient to study the correlation function $h(\vec{r}_1, \vec{r}_2)$ in isolation, which simplifies the problem. We will therefore say that h is *psd* if $(1, h)$ is *psd*.

B. Methods for Proving Positive-Semidefiniteness

While we do not have a general criterion for proving that some given h is *psd* or not, these few approaches will nevertheless help us analyse most particular cases:

- 1) If there exists an explicit constructive algorithm for generating data according to h , then h is necessarily *psd*, since the resulting covariance matrix will always be *psd* (see Property 4).
- 2) If there exists at least one choice of $[\vec{r}_1, \dots, \vec{r}_N]$ for which \mathbf{K} is not *psd*, then h is not *psd*. For this test, we need $N \geq 3$, since every correlation matrix of size 2 is *psd*:

$$\begin{bmatrix} 1 & \rho \\ \rho & 1 \end{bmatrix} = \begin{bmatrix} u & v \\ v & u \end{bmatrix}^2, -1 \leq \rho \leq 1, \\ u = \frac{1}{2} \sqrt{1 + \rho} + \frac{1}{2} \sqrt{1 - \rho}, v = \frac{1}{2} \sqrt{1 + \rho} - \frac{1}{2} \sqrt{1 - \rho}. \quad (8)$$

However, $N = 3$ may not be enough [57].

- 3) Several theorems can also be used to prove that some h is *psd*, as seen in the next section.

C. One-Parameter and Separable Correlation

Proving that isotropic models (functions of $d = \|\vec{r}_1 - \vec{r}_2\|$ only, with $\vec{r}_i \in \mathbb{R}^2$) are *psd* is not trivial. Indeed, while for all *psd* models $h(d)$, the function $h(x)$ on \mathbb{R}^+ is positive definite, the converse is not true, and tighter conditions are needed [66, p.361]. The following two Theorems are examples of tests that can be applied to verify that $h(d)$ is *psd*:

Theorem 2. A one-parameter correlation model $h(d)$ with

$d = \|\vec{r}_1 - \vec{r}_2\|$ with $\vec{r}_i \in \mathbb{R}^2$ is psd if² the integral

$$f(\omega) = \int_0^\infty h(x) J_0(\omega x) x dx \quad (9)$$

exists and is non-negative $\forall \omega \geq 0$. $J_0(x)$ is here the Bessel function of the first kind of order 0. [66, p.357]

Theorem 3. A one-parameter correlation model $h(d)$ with $d = \|\vec{r}_1 - \vec{r}_2\|$ with $\vec{r}_i \in \mathbb{R}^2$ is psd if²

- 1) the function $h(x)$ with $x \in \mathbb{R}^+$ is positive definite and
- 2) the Fourier transform $f(\omega)$ of $h(|x|)$ is non-increasing on $\omega \in (0, \infty)$.

The converse is not true. [66, p.361]

Many other useful properties of isotropic correlation models are found in [66, Chapter 22].

Theorem 4. A one-parameter correlation model $h(\theta)$ with $\theta = |\angle \vec{r}_1 - \angle \vec{r}_2 + 2k\pi|, k \in \mathbb{Z}$ such that $\theta \in [0^\circ, 180^\circ]$ is psd if it may be written as

$$h(\theta) = \sum_{n=0}^{\infty} a_n \cos(n\theta), \quad (10)$$

for some non-negative and bounded sequence a_0, a_1, \dots with $0 < \sum_{n=0}^{\infty} a_n < \infty$.

Proofs are given in [55], [56].

Theorem 5. A one-parameter correlation model $h(|x|)$ with $|x| = |g(\vec{r}_1) - g(\vec{r}_2)|$ for some function $g : \mathbb{R}^2 \setminus \{0\} \mapsto \mathbb{R}$ is psd if it may be written as

$$h(x) = \int_0^\infty \cos(2\pi x \omega) f(\omega) d\omega \quad (11)$$

for some non-negative and finite-area $f(\omega)$ on $0 < \omega < \infty$.

Proof: From Bochner's Theorem, $h(x)$ in (11) is a psd function. From Definition 5, it follows that for any N the matrix $\mathbf{H}_{N \times N}$ with entries $\rho_{i,j} = h(|t_i - t_j|), t_i = g(\vec{r}_i)$ is psd. ■

Theorem 6. If a correlation model h may be written as

$$h(\vec{r}_1, \vec{r}_2) = h_1(\vec{r}_1, \vec{r}_2) h_2(\vec{r}_1, \vec{r}_2) \quad (12)$$

with h_1 and h_2 both psd, then h is also psd.

Proof: Let \mathbf{H} , \mathbf{H}_1 , and \mathbf{H}_2 be the $N \times N$ matrices with entries $h(\vec{r}_i, \vec{r}_j)$, $h_1(\vec{r}_i, \vec{r}_j)$, and $h_2(\vec{r}_i, \vec{r}_j)$ respectively. We may then write $\mathbf{H} = \mathbf{H}_1 \circ \mathbf{H}_2$. Now since h_1 and h_2 are psd, it follows that \mathbf{H}_1 and \mathbf{H}_2 are both psd. Applying Schur's product Theorem, we have that \mathbf{H} is also psd, which implies that h is psd. ■

A similar argument was given in [56], but for positive definite instead of psd matrices.

D. Incorporating Time and Uplink-Downlink Correlation

As seen in Section II-E, shadowing may evolve in time in a correlated manner. Also, as seen in Section II-F, shadowing may be different on the same propagation path in

²These two theorems apply for shadowing on \mathbb{R}^2 , and take a more restricted form on \mathbb{R}^3 [66].

both directions, though these are usually highly correlated. We will show that, given a positive definite temporal auto-correlation $R_S(\tau)$ and a psd spatial correlation model h , and assuming correlation separability between the spatial, time, and uplink-downlink dimensions, the resulting combined correlation matrix is always psd. Combining cross-correlation with temporal auto-correlation was described in [8].

Consider a common node X and N nodes Y_1, \dots, Y_N . Let $S_i(t)$ be the shadowing on path $\overrightarrow{XY_i}$ at time instant t with variance $\sigma_i^2 = \sigma_s^2(\vec{r}_i)$, and \tilde{S}_i the shadowing on the return path $\overrightarrow{Y_i X}$, with variance $\tilde{\sigma}_i^2 = \tilde{\sigma}_s^2(\vec{r}_i)$.

Consider the spatial correlation function h such that $\rho_{i,j} = h(\vec{r}_i, \vec{r}_j), i \neq j$ and $\rho_{i,i} = 1$:

$$\begin{aligned} \mathbb{E}\{S_i(t)S_j(t)\} &= \sigma_i\sigma_j\rho_{i,j} \quad \forall t, \\ \mathbb{E}\{\tilde{S}_i(t)\tilde{S}_j(t)\} &= \tilde{\sigma}_i\tilde{\sigma}_j\rho_{i,j} \quad \forall t. \end{aligned} \quad (13)$$

We will assume that the correlation between the two directions of the same path is constant, as in [76]:

$$\mathbb{E}\{S_i(t)\tilde{S}_i(t)\}/\sigma_i\tilde{\sigma}_i = \rho_{ud} \quad \forall i \forall t. \quad (14)$$

Consider also the normalised temporal auto-correlation function $\zeta(\tau)$:

$$\frac{\mathbb{E}\{S_i(t)S_i(t+\tau)\}}{\sigma_i^2} = \frac{\mathbb{E}\{\tilde{S}_i(t)\tilde{S}_i(t+\tau)\}}{\tilde{\sigma}_i^2} = \zeta(\tau) \quad \forall i \forall t, \quad (15)$$

where $\zeta(\tau)$ is positive definite and $\zeta(0) = 1$.

We will further assume separability of cross-correlation and uplink-downlink correlation, so that the correlation terms can be found as follows:

$$\begin{aligned} \frac{\mathbb{E}\{S_i(t_1)S_j(t_2)\}}{\sigma_i\sigma_j} &= \frac{\mathbb{E}\{\tilde{S}_i(t_1)\tilde{S}_j(t_2)\}}{\tilde{\sigma}_i\tilde{\sigma}_j} = \rho_{i,j}\zeta(t_2 - t_1), \\ \mathbb{E}\{S_i(t_1)\tilde{S}_j(t_2)\} &= \sigma_i\tilde{\sigma}_j\rho_{ud}\rho_{i,j}\zeta(t_2 - t_1). \end{aligned} \quad (16)$$

From this equation we see that separability implies that the uplink and downlink cross-correlation models must be the same: $h = \tilde{h}$.

Consider M time instances t_1, \dots, t_M . Then the correlation matrix of $S_1(t_1), \tilde{S}_1(t_1), \dots, S_N(t_1), \tilde{S}_N(t_1), \dots, S_1(t_M), \tilde{S}_1(t_M), \dots, S_N(t_M), \tilde{S}_N(t_M)$ is

$$\bar{\mathbf{K}}_{2NM \times 2NM} = [\zeta(t_j - t_i)]_{M \times M} \otimes \left((\check{\mathbf{s}}\check{\mathbf{s}}^T) \circ \left([\rho_{i,j}]_{N \times N} \otimes \begin{bmatrix} 1 & \rho_{ud} \\ \rho_{ud} & 1 \end{bmatrix} \right) \right), \quad (17)$$

where $\check{\mathbf{s}}$ is the column vector with entries $\sigma_1, \tilde{\sigma}_1, \dots, \sigma_N, \tilde{\sigma}_N$.

Theorem 7. Given a psd correlation function h , uplink and downlink shadowing variances $\sigma_s^2(\vec{r}), \tilde{\sigma}_s^2(\vec{r})$, an uplink-downlink correlation coefficient $-1 \leq \rho_{ud} \leq 1$, and a normalised shadowing positive definite time auto-correlation function $\zeta(\tau)$ with $\zeta(0) = 1$, and assuming the correlation is separable as in (16), we can conclude that the composite correlation model is psd.

Proof: Consider (17). The matrix $\check{\mathbf{s}}\check{\mathbf{s}}^T$ is always psd, as seen in the proof of Theorem 1. The matrix $[\zeta(t_j - t_i)]_{M \times M}$ is

psd because $\zeta(\tau)$ is positive definite, and the matrix $[\rho_{i,j}]_{N \times N}$ is *psd* because h is *psd*. Finally, all 2×2 correlation matrices are *psd*, as seen in (8). Both the Hadamard and the Kronecker products are *psd* if both their factors are *psd* as seen in Properties 1 and 2. It follows that \bar{K} is *psd*. ■

Simply speaking, one can incorporate (separable) directional and time correlation without upsetting the positive-semidefiniteness of the correlation model. Other dimensions, notably frequency [49], may also be similarly incorporated.

One can note that the Kronecker product has been similarly used in [77] in a multi-antenna context, and in [45] for correlation between shadowing, delay spread, and angle spread, all under the assumptions of separability, which is natural when no further information is available [45].

V. ESTIMATING THE CORRELATION FUNCTION FROM MEASURED DATA

In order to better understand why estimated models may be *psd* or not, it is worthwhile to examine some aspects of how these models are constructed from measured data.

A. Auto-Correlation as Mixed Time-Space Measurements

Auto-correlation is measured [24]–[26], [28], [32], [36]–[39] by taking a single moving mobile Y with velocity v in uniform rectilinear motion, measuring the power loss between Y and a base station X , correcting for pathloss and small-scale fading, and considering the shadowing S along the path \overrightarrow{XY} (or \overrightarrow{YX}) as a process of time $S(t)$ (equivalently, of space: $S(d)$, with $d = vt$ [78], [79]). The underlying assumption is that shadowing over a fixed link does not vary with time (or perhaps varies little or very slowly compared to variation when in motion). More specifically, consider the shadowing $S(\vec{r}, t)$ as would be experienced by a virtual mobile \tilde{Y} at time t and location \vec{r} . Now let the real mobile Y begin at location \vec{r}_0 at time $t = 0$ and move in uniform rectilinear motion with velocity \vec{v} . Thus its location at time t is $\vec{r} = \vec{r}_0 + t\vec{v}$. The observed shadowing process at Y is thus $S(t) = S(\vec{r}_0 + t\vec{v}, t)$ or, equivalently, $S(d) = S(\vec{r}_0 + d\vec{v}/v, d/v)$. Clearly, the observed process varies in both time and space, and assuming $S(\vec{r}, t)$ varies in t when \vec{r} is fixed (see Section II-E), these measurements do not directly translate into a correlation model. For example, a different model $S(d)$ might be extracted if the velocity v is changed. This is generally true for other motion trajectories.

An additional issue about auto-correlation models is the level-crossing rate, which is only properly defined for some models. This topic is addressed in [61], [62], [79]–[81], and we do not explore it here further.

B. Cross-Correlation as Spatial-Only Correlation

Several field measurements have been performed [18], [24], [28], [29], [33], [34], [36]–[38] in order to gather data about the true physical correlation model, which we call \bar{h} . Field measurements produce a set of data points, from which an estimate of the cross-correlation function, which we call \hat{h} , is obtained by fitting the data with plausible-looking simple

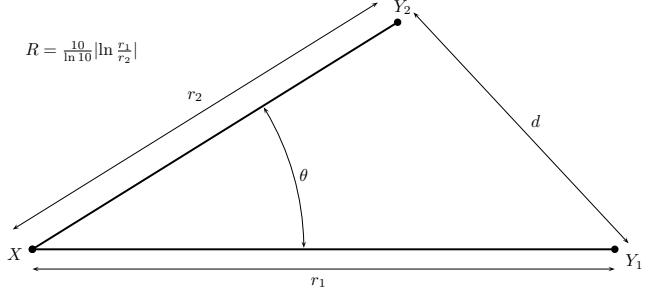


Fig. 3. A pair of auto- or cross-correlated paths, with the most relevant dimensional variables: d , θ , R .

mathematical functions. It must be understood that \bar{h} is always a *psd* model, by its very mathematical definition in (4). It was argued in [57] that a particular conveniently *psd* model \hat{h} may not reflect the true correlation accurately. This is true. However, because \bar{h} must be *psd*, it is likely that there exists some *psd* model \hat{h} that is close to \bar{h} . Therefore, we argue that it is always best and possible to choose a *psd* model \hat{h} that is also close to \bar{h} .

In general, $\bar{h}(\vec{r}_1, \vec{r}_2)$ is a function of four variables. However, estimating a four-variable function accurately requires many more points than can realistically be obtained from costly and cumbersome field measurements. Additionally, every point of the function \bar{h} is itself estimated as an expectation (4), and requires several data points. Two consequences follow:

- 1) The measurement data is usually grouped by collapsing it from four variables onto a single one.
- 2) On that one variable, the curve-fitting is still relatively crude [26], [28], [31], [32], [34], [39].

These two approximation steps further distance \hat{h} from the \bar{h} and may cause the model \hat{h} to be non-*psd*. Nevertheless, for practical reasons, it is simplest to measure correlation along one dimension only [66, pp. 358–359].

C. Collapsing Correlation onto One Dimension

The measurements can be grouped along one variable in several ways. In such cases, \hat{h} is expressible as a function of a single free variable. The most common forms are:

- 1) Absolute distance (between Y_1 and Y_2) [24]–[26], [28], [31], [32], [36]–[39]: $d = \|\vec{r}_1 - \vec{r}_2\|$.
- 2) Angle (not oriented) of arrival separation [24], [28], [33], [34], [36]–[38], [56]: $\theta = |\angle \vec{r}_1 - \angle \vec{r}_2| \in [0^\circ, 180^\circ]$.
- 3) Arrival distance ratio (in dB) [33], [37], [56], [72]: $R = |10 \log_{10} r_1/r_2| = \frac{10}{\ln 10} |\ln r_1 - \ln r_2|$.

These quantities are illustrated in Figure 3.

For correlation functions expressed in d , one may also estimate and fit the power spectral density (which is the Fourier transform of the auto-correlation function in differences of d) of the measured data to that of a particular model [28], [32].

VI. SPECIFIC CORRELATION MODELS AND THEIR POSITIVE-SEMIDEFINITENESS

We have made a wide (if not exhaustive) investigation of correlation models h used in literature. All existing models

imply jointly lognormal shadowing (which is by no means a requirement of our analysis). Most models assume a constant shadowing variance $\sigma_s^2(\vec{r}) = \sigma_s^2$, but not all [1], [39]. As we have shown in Theorem 1, the positive-semidefiniteness of a shadowing model is separate from the shadowing spread function. As such, we may safely study the existing correlation models, while looking forward to more complex point-to-point shadowing spread models in the future.

The various existing models and their properties are summarised in Table I. In particular, we show which models are *psd*. While [45] stated that “most” models are non-*psd*, we find that actually a slight majority of models are in fact *psd*.

It should be understood that these models are not necessarily mutually exclusive when they are expressed in different (d, R, θ) domains, since this implies a different reduction (integration) of the original four-dimensional model \bar{h} onto one or two dimensions, possibly representing different projections of the same \bar{h} onto those dimensions.

A. Constant Model

The simplistic model that assigns $\rho_{i,j} = \rho, i \neq j$:

$$h(\vec{r}_1, \vec{r}_2) = \rho, \quad (18)$$

with $0 < \rho < 1$, is sometimes used [5], [9]–[11], [20], [21], [29], [42], [45], [47], [53], [61], [63], [76], [82], [83] ($\rho = 0.5$ [7], [23], [59], [60]) when more information is lacking. However, [7] argued that this may be a too simplistic model, comparing simulations that use constant versus non-constant models. On the other hand, we have shown [13] that for a high number of highly-correlated lognormal-shadowed interferers, the total interference power may be well-approximated with the knowledge of the average correlation coefficient only. (It is important to actually estimate this average. This was not done in [7].)

The model is claimed *psd* for $\rho = 0.5$ in [45]. It does, in fact, give a *psd* \mathbf{H} for $\rho \geq -1/(N-1)$ [83], and so the model is *psd* according to Definition 6 for $0 < \rho < 1$ (and also $\rho = 0, 1$), but would be non-*psd* for $-1 \leq \rho < 0$. It can be simulated quickly [42], [83] in the case of jointly lognormal correlated shadowing.

B. Absolute Distance-Only Models

All the auto-correlation models are expressed as a function of d (equivalently, of time t , given a constant velocity v).

1) *Exponential Model:* The most common auto-correlation model is a decaying exponential of distance [6], [8], [25], [26], [31], [36], [38]–[40], [42], [45], [48], [49], [51], [52], [56], [62], [70], [73], [74], [78], [80], [84]–[88]. This model is often attributed to Gudmundson in 1991 [26], though the less-cited work by Marsan, Hess, and Gilbert in 1990 [25] also proposes this model, and measurements by Graziano in 1978 [24, Figs. 5 and 7] suggest it. This model has also been interpreted as a cross-correlation model [74]. It may be expressed as

$$h(d) = e^{-d/d_0}, \quad (19)$$

where $d_0 > 0$ is the tunable parameter called the decorrelation distance (sometimes defined for 50% correlation, rather than

$1/e$). Literature surveys have been made [85], [86] of the values that d_0 might take in field measurements. While this model can be understood as being based on a first-order auto-regressive (AR(1)), i.e., first-order Markov, process [45], its positive-semidefiniteness is not thereby evident, since, on a non-linear trajectory, non-successive points may have different correlation coefficients than simply those constructed by an AR(1) filter. The fact that e^{-x/d_0} is a *psd* function on \mathbb{R}^+ is a necessary but not sufficient condition [66, p.361] (the same applies for any model depending on d). Nevertheless, this model is proved to be *psd* using Theorem 2 in [66, p.362], and similarly in [56].

For equally-spaced ordered points Y_1, \dots, Y_N on a straight line with separation d_{sep} , we have the correlation coefficients equal to $\rho_{i,j} = \rho^{|i-j|}$, where $\rho = e^{-d_{\text{sep}}/d_0}$. We then have a correlation matrix as in [89], which is necessarily *psd*, because the model (19) is *psd*.

2) *More Complex Models:* The exponential model has inspired some more complex models, which may be interpreted as auto- or cross-correlation models.

In [28], [32], [90], a sum of two independent exponential processes is used, which leads to the following correlation model:

$$h(d) = ae^{-d/d_1} + (1-a)e^{-d/d_2}, \quad (20)$$

where $0 \leq a \leq 1$, $0 < d_1, 0 < d_2$ are tunable parameters. This model is always *psd*.

Proof: Applying (20) in (9), we may separate the resulting integral by linearity into two integrals, both of which are non-negative as seen for the model (19), and weighed by the non-negative coefficients a and $1-a$. The resulting integral (9) for this model is thus non-negative. It follows from Theorem 2 that this model is *psd*. ■

In [61], [79] (and implicitly in [81]), a Gaussian correlation model is used:

$$h(d) = e^{-(d/\bar{d})^2}, \quad (21)$$

where $\bar{d} > 0$ is the tunable parameter. This model is proved to be *psd* using Theorem 2 in [66, p.364].

In [81], a convolution of an exponential and a Gaussian function is proposed:

$$h(d) = Ke^{-|d|/d_0} * e^{-(d/\bar{d})^2} = K \int_{-\infty}^{\infty} e^{-|d-t|/d_0 - t^2/\bar{d}^2} dt, \quad (22)$$

where $d_0 > 0, \bar{d} > 0$ are the tunable parameters, and $K = \exp(-\bar{d}^2/4d_0^2)/\sqrt{\pi}\bar{d}$. This model is *psd*.

Proof: The Fourier transform of (22) with $x = d$ is

$$f(\omega) = K \frac{2/d_0}{\omega^2 + d_0^{-2}} \bar{d} \sqrt{\pi} e^{-\frac{1}{4}(\bar{d}\omega)^2},$$

which meets the conditions of Theorem 3. ■

In [91], a model is proposed that can be written:

$$h(d) = e^{-(d/d_0)^\nu}, \quad (23)$$

with $d_0 > 0, \nu > 0$ tunable parameters. The positive-semidefiniteness of this model is dependent on ν : for $0 < \nu \leq 2$, it is proved to be *psd* with the aid of Theorem 3 in [66, p.364]. This of course includes the models (19) and (21), as

well as the choice of $\nu = 0.9682$ in [91]. For $\nu > 2$ however, the model is in non-psd [66, p.137]. As a counterexample, consider three aligned points with equal consecutive spacings of $0.2d_0$, for which we find that the correlation matrix is not psd for $\nu = 2.1, 2.2, 2.5, 3, 5, 50$.

C. Angle-Only Models

Some of the first shadowing correlation measurements along θ were reported in [18], [24], but no analytical model was extracted. A similar measurement campaign [37] reported much lower angular correlation, suggesting the need for a more complex model. However, it has been argued [45] that θ is the most significant parameter in cross-correlation, which justifies using these models as a first approximation.

In [55], [84], and later in [15], [92], a cosine model was proposed:

$$h(\theta) = A \cos \theta + B, \quad (24)$$

with two tunable parameters $A \geq 0, B \geq 0, A + B \leq 1$. The model was used and assumed psd in [45]. Typical parameter choices have been $A = 0.3, B = 0.5$ [17], [19], [21], [62] and $A = 0.3, B = 0.699(9)$ [15], [92].

The model was proved to be psd in [6], [55], [56] using Theorem 4, by setting $a_0 = A, a_1 = B$ and all other $a_n = 0$.

In [34], a piecewise-linear model was proposed:

$$h(\theta) = \begin{cases} 0.78 - 7\theta/1250^\circ & 0^\circ \leq \theta < 15^\circ, \\ 0.48 - 7\theta/1250^\circ & 15^\circ \leq \theta < 60^\circ, \\ 0 & 60^\circ \leq \theta \leq 180^\circ. \end{cases} \quad (25)$$

It was shown in [57] that this model is non-psd. Here is an example: $N = 7$ with $\angle \vec{r}_i = 0, 5, \dots, 30^\circ$.

In [33, Table 1], a lookup table for intervals of θ , effectively a piecewise-constant model was given:

$$h(\theta) = \begin{cases} 0.6 & 0^\circ \leq \theta < 30^\circ, \\ 0.25 & 30^\circ < \theta < 60^\circ, \\ \alpha \geq 0.2 & \theta \geq 90^\circ. \end{cases} \quad (26)$$

This model is undefined for $\theta \in \{30^\circ\} \cup [60^\circ, 90^\circ]$. We understand that a value for α may be chosen on $[0.2, 0.25]$. Regardless of the missing information, the model is non-psd, as shown in this example: $N = 11$ with $\angle \vec{r}_i = 0, 4, \dots, 40^\circ$.

A triangular model in θ was proposed in [72]:

$$h(\theta) = \begin{cases} a - (a - b)\theta/\theta_0 & \theta \leq \theta_0, \\ b & \theta > \theta_0, \end{cases} \quad (27)$$

with $0 \leq b < a \leq 1$ and $0^\circ < \theta_0 \leq 180^\circ$ three tunable parameters. In [72], the model $a = 0.8, b = 0.4, \theta_0 = 60^\circ$ was used to fit the measurements in [24]. The same choice of parameters was proposed for cross-correlation modeling for the 802.16m standard [87]. Also, $a = 0.8, b = 0, \theta_0 = 60^\circ$ was proposed to fit the measurements in [34], previously fitted with (25). In [28], the same model with $a = 0.9, b = 0, \theta_0 = 180^\circ$ was used. This model is always psd for any choice of parameters.

Proof: Consider

$$a_0 = b + (a - b)\frac{\theta_0}{2\pi}, \quad a_n = 2(a - b)\frac{1 - \cos \theta_0 n}{\pi \theta_0 n^2}.$$

Using Theorem 4 yields (27). \blacksquare

A decaying exponential angle model has also been proposed [4], [41], [56], [93]:

$$h(\theta) = e^{-\alpha\theta}, 0^\circ \leq \theta \leq 180^\circ, \quad (28)$$

with $\alpha > 0$ a tunable parameter. This model can be seen as inspired from the exponential d model (19), which it approximates for small θ . This model is psd [56].

Proof: Consider

$$a_0 = \frac{1 - e^{-\alpha\pi}}{\alpha\pi}, \quad a_n = \frac{2}{\pi} \frac{\alpha}{n^2 + \alpha^2} (1 - e^{-\alpha\pi}(-1)^n).$$

Using Theorem 4 yields (28). \blacksquare

D. Separable Models

Separable models are easily constructed from the multiplication of one-dimensional models. Theorem 6 shows that if the component one-dimensional models are psd, so is the composite separable model.

1) *Angle-Distance Ratio:* Separable θ - R models may always be written as

$$h(\theta, R) = h_\Theta(\theta)h_R(R). \quad (29)$$

The use of the θ and R dimensions for shadowing correlation models has been argued in [37], [38], [45], [56], [62], [72], though separability may be a simplistic assumption [56].

In [72], the model “1.0/0.0 RX” is given as

$$h_\Theta(\theta) = \begin{cases} 1 - \theta/75^\circ & \theta \leq 60^\circ, \\ 0 & \theta \geq 60^\circ, \end{cases} \quad (30)$$

and

$$h_R(R) = \max(0, 1 - R/R_0), \quad (31)$$

with $R_0 > 0$, with R_0 usually in [6 dB, 20 dB]. This model is not psd, as shown in the following example: let $N = 7$ and all r_i equal, and let $\vec{r}_i = 0, 15, \dots, 90^\circ$.

The problem with the preceding model is its discontinuity at $\theta = 60^\circ$. This is simple to resolve: if we use the general form (27) as $h_\Theta(\theta)$ and (31) as $h_R(R)$, we have a very flexible model that is always psd.

Proof: $h_R(R)$ is shown to be psd by choosing

$$f(\omega) = \frac{2 \sin^2(\pi R_0 \omega)}{\pi^2 R_0 \omega^2}$$

with $g(\vec{r}) = \frac{10}{\ln 10} \ln \|\vec{r}\|$ in Theorem 5. Equivalently, we may use Pólya’s Theorem, as in [56].

The model (27) was already shown to be psd.

Now h is expressed as a product of two psd models, and it follows from Theorem 6 that $h(\theta, R)$ is psd. \blacksquare

2) *Angle-Absolute Distance:* In [46], a separable model depending on d and θ is used, and can be rewritten:

$$\begin{aligned} h_d(d) &= e^{-d/d_0}, \\ h_\Theta(\theta) &= \begin{cases} 1 & \theta \leq 90^\circ, \\ 0 & \theta > 90^\circ, \end{cases} \\ h(d, \theta) &= h_d(d)h_\Theta(\theta). \end{aligned} \quad (32)$$

(There is a mistype in the original equation [46, eq. 18]: the term $\sigma_{\psi_p}^2$ should be removed, as confirmed in a private communication with D. Kaltakis).

The authors say that this model is *psd*; however, this claim is not substantiated, though we understand that their simulations always gave *psd* correlation matrices. We already recognise the model $h_d(d)$ from (19), which we know to be *psd*. However, it is simple to show that h_Θ is non-*psd*, therefore the product of the two might not be *psd* either. In fact, the following counterexample shows it is not *psd*: $N = 14$ with $r_i = d_0$, $\angle \vec{r}_i = 0, 180/7, \dots, 2340/7^\circ$.

The authors of [46] claim that this model is *psd*, based on their simulations. This is to be expected: because the model can be approximated by (19) for $r_i \gg d_0$, as might be the case in the cellular context, it can often appear *psd* in simulations. However, strictly speaking, it is non-*psd*, and our example shows that it can fail, particularly in cases of small r_i .

In [94], the same author proposes

$$\begin{aligned} h_d(d) &= e^{-d/d_0}, \\ h_\Theta(\theta) &= \max(0, \cos(\theta)) \\ h(d, \theta) &= h_d(d)h_\Theta(\theta). \end{aligned} \quad (33)$$

Again, while the model appears *psd* [94], in fact it is not, as attested by the following counterexample: $N = 8$ with $r_i = 0.4 \cdot d_0$, $\angle \vec{r}_i = 0, 45, \dots, 325^\circ$. However, this is a case with very small r_i . In practice, for $r_i \gg d_0$, this model is well-approximated by

$$h(d, \theta) = e^{-d/d_0} \cos(\theta), \quad (34)$$

which is *psd*.

Proof: Model (34) is the product of models (19) and (24) with $A = 1, B = 0$, both of which were shown to be *psd*. Then, by Theorem 6, (34) is *psd*. ■

E. More Elaborate (Non-Separable) Models

It has been suggested [56] that separable models might not be sufficient to accurately model shadowing correlation.

Saunders' model [73] has been used in [7], [43], [45], [57], [95] (but watch for various transcription errors):

$$\begin{aligned} h_1 &= 10^{-0.05R}, & h_2 &= \begin{cases} 1 & \theta < \theta_T, \\ (\theta_T/\theta)^\gamma & \theta \geq \theta_T, \end{cases} \\ \theta_T &= 2 \arcsin \frac{d_0}{2 \min\{r_1, r_2\}}, & h(\theta, r_1, r_2) &= h_1 h_2, \end{aligned} \quad (35)$$

where d_0 is the same correlation distance as measured for model (19), and $\gamma > 0$ is the other tunable parameter (a typical value is $\gamma = 0.3$). The model is not separable in θ and R because θ_T depends on r_1 and r_2 . This model is non-*psd*, as seen in [45], [46], [57] and as is apparent from this example: $N = 3$ with $r_i = r \geq d_0/\sqrt{2}$ and $\angle \vec{r}_i = 0, \theta_T, 2\theta_T$.

Also, we see that this model is undefined for $r_i < d_0/2$, since the domain of \arcsin is $[-1, 1]$. To rectify this problem, Saunders' model has been modified [1] (also [88], but note some transcription errors) by augmenting its domain:

$$h(\theta, r_1, r_2) = \begin{cases} \text{Equation (35)} & r_1, r_2 \geq d_0/2, \\ \sqrt{d_0/2 \max\{r_1, r_2\}} & \text{otherwise.} \end{cases} \quad (36)$$

Notice however that if more than one r_i is less than $d_0/2$, we will again have $h > 1$, which is not a valid correlation value.

Also, extending the model's domain cannot make it *psd*: the same counter-examples used to show that (35) is non-*psd* can be used to show that (36) is non-*psd*.

Another model was given in [33, Table 2] and used in [45]. It is piecewise constant on rectangles in the θ - R domain:

$$h(\theta, R) = \begin{cases} R < 2 & 2 < R < 4 & R \geq 4 \\ 0.8 & 0.6 & 0.4 & \theta < 30^\circ, \\ 0.5 & 0.4 & 0.2 & 30^\circ < \theta < 60^\circ, \\ 0.4 & 0.4 & 0.2 & 60^\circ < \theta < 90^\circ, \\ 0.2 & 0.2 & 0.2 & \theta \geq 90^\circ. \end{cases} \quad (37)$$

The entries of this table cannot be obtained from an outer product, and thus the model is non-separable. The model is non-*psd*, as observed in [45], [46], [57]; for example: $N = 6$ with $r_i = r \forall i$ and $\angle \vec{r}_i = 0, 7, 14, 21, 28, 35^\circ$.

Another model is given in [22]:

$$\begin{aligned} h_\Theta(\theta) & \quad \text{as in Equation (25),} \\ h_R(R) &= \max(0, (1 - R/R_0)^\alpha) \\ h(\theta, R) &= h_R(R)(h_\Theta(\theta) + a) + b, \end{aligned} \quad (38)$$

with $a > 0, b > 0, a + b \leq 0.22, \alpha \geq 0$ and $R_0 > 0$. When $b \neq 0$, this model is not quite separable. It is not *psd*, as seen from the same counterexample as used for model (25), with $a = b = 0$ and $r_i = r \forall i$.

Finally, the model "1.0/0.4 RX" in [72] takes the form:

$$h(\theta, R) = \begin{cases} \max\left(0, 1 - \frac{R}{R_0}\right)\left(0.6 - \frac{\theta}{150^\circ}\right) + 0.4 & \theta \leq 60^\circ, \\ 0.4 & \theta > 60^\circ, \end{cases} \quad (39)$$

where R_0 is chosen between 6 and 20 dB. This model is not *psd*, as attested by the following example: with $N = 4$, regardless of the value of R_0 , choose r_i all equal, and $\angle \vec{r}_i = 0, 30, 60, 90^\circ$.

VII. SOME THOUGHTS ON PHYSICAL REALISM

While this paper focuses on the mathematical feasibility of correlation models, we would like to give a few thoughts about physical realism as well: can the correlation model h be considered realistic, based on what we know about wireless propagation? Does it make sense intuitively? It is important to keep in mind that, while mathematical feasibility is an objective criterion, physical plausibility is relative to the understanding of wireless shadowing, and therefore the criteria presented in this section are merely tentative. We hope that these initial ideas will encourage thought and discussion on what a shadowing correlation model should realistically look like. Nevertheless, these initial criteria can give a first approximation in choosing a good correlation model.

Proposition 1. *Shadowing is a large-scale phenomenon, averaged over small displacements in space (and time), and should not by nature vary quickly in these dimensions [26], [45], [56], [62].*

Proposition 2. *As argued in [7], [18], [37], [59], [60], [72], [73], [86], [95], correlation in shadowing may*

TABLE I
SUMMARY OF EXISTING SHADOWING CORRELATION MODELS AND THEIR PROPERTIES.

Model Name	Equation	Tunable Parameters	References	Dimensions	psd	Physical Properties ^b Violated
Constant	(18)	$0 < \rho < 1$	many	none	Yes	1, 5, 7
Exp(d)	(19)	$d_0 > 0$	[25], [26], ...	d	Yes	7
Exp+Exp(d)	(20)	$0 \leq a \leq 1, 0 < d_1, 0 < d_2$	[28], [32], [90]	d	Yes	7
Gaussian(d)	(21)	$\bar{d} > 0$	[79]	d	Yes	7
Exp*Gaussian(d)	(22)	$d_0 > 0, \bar{d} > 0$	[81]	d	Yes	7
Exp(d^ν)	(23)	$d_0 > 0, 0 < \nu \leq 2$	[91]	d	Yes	7
		$d_0 > 0, \nu > 2$			No	7
Cos(θ)	(24)	$A \geq 0, B \geq 0, A + B \leq 1$	[15], [55], [84], [92]	θ	Yes	(1) ^c , (2) ^c , 4, (5) ^c
Piecewise(θ)	(25)	none	[34]	θ	No	1, 6
Stepwise(θ)	(26)	none	[33, Table 1]	θ	No	1, 5, 6
Triangular(θ)	(27)	$0 \leq b < a \leq 1, 0^\circ < \theta_0 < 180^\circ$	[72]	θ	Yes	(1) ^c , (2) ^c , (5) ^c
Exp(θ)	(28)	$\alpha > 0$	[4], [41], [56], [93]	θ	Yes	2, (5) ^c
“1.0/0.0 RX”	(29), (30), (31)	$R_0 > 0$	[72]	θ, R	No	6
Triangular(θ) \times Triangular(R)	(29), (27), (31)	$0 \leq b < a \leq 1, 0^\circ < \theta_0 < 180^\circ, R_0 > 0$	modified [72]	θ, R	Yes	(1) ^c , (5) ^c
		$b = 0, a = 1$			Yes	none
Exp(d) \times ($\theta \leq 90^\circ$)	(32)	$d_0 > 0$	[46]	d, θ	No	6
Exp(d) \times cos ⁺ (θ)	(33)	$d_0 > 0$	[94]	d, θ	No	none
Exp(d) \times cos(θ)	(34)	$d_0 > 0$	modified [94]	d, θ	Yes	4
Saunders'	(35)	$d_0 > 0, \gamma > 0$	[73], [96]	$(\theta, r_1, r_2)^a, r_i > d_0/2$	No	2, (5) ^c
Modified Saunders'	(36)	$d_0 > 0, \gamma > 0$	[1]	$(\theta, r_1, r_2)^a, r_2, \dots, r_N > d_0/2$	No	2, 3, (5) ^c , 6
Stepwise(θ, R)	(37)	none	[33, Table 2]	$(\theta, R)^a$	No	1, 5, 6
Piecewise(θ)-Triangular $^\alpha$ (R)	(38)	$R_0 > 0, \alpha \geq 0, a > 0, b > 0, a+b \leq 0.22$	[22]	$(\theta, R)^a$	No	(1) ^c , (5) ^c , 6
“1.0/0.4 RX”	(39)	$R_0 > 0$	[72]	$(\theta, R)^a$	No	5, 6

^aNon-separable

^bAs described in Section VII

^cPhysical property met only for some parameter choices

be explained by a partial overlap of the large-scale propagation medium, as seen in Figure 4. The non-overlapping propagation areas are considered independent. When a propagation front passes through successive areas, the gains are multiplicative, and thus add in the logarithmic domain. We may then write:

Let W, W_1, W_2 be independent random variables with zero mean and variances a^2, b^2, c^2 respectively. We have

$$\begin{aligned} S_1 &= W + W_1, \\ S_2 &= W + W_2. \end{aligned} \quad (40)$$

It follows that

$$\begin{aligned} \text{VAR}\{S_1\} &= a^2 + b^2 = \sigma_s^2(\vec{r}_1), \\ \text{VAR}\{S_2\} &= a^2 + c^2 = \sigma_s^2(\vec{r}_2), \\ \mathbb{E}\{S_1 S_2\} &= a^2, \end{aligned} \quad (41)$$

and therefore

$$h(\vec{r}_1, \vec{r}_2) = \frac{a^2}{\sqrt{(a^2 + b^2)(a^2 + c^2)}}. \quad (42)$$

This applies to any pair of shadowing terms.

This interpretation leads us to formulate the following criteria:

- 1) $h(\vec{r}_i, \vec{r}_j) \approx 1$ for $\vec{r}_i \approx \vec{r}_j$.
- 2) $h(\vec{r}_i, \vec{r}_j) \ll 1$ for $\|\vec{r}_i - \vec{r}_j\| \gg 0$.
- 3) h should be a non-increasing function in θ (on $[0, \pi]$) [24], [33], [45], [56], R [33] and d .
- 4) h should be non-negative, according to (41). However, this is contradicted by some measurement campaigns [24], [26], [27], [30], [34], [36]–[39], which reported some significantly negative estimated correlation coefficients in some cases. It would be interesting to study

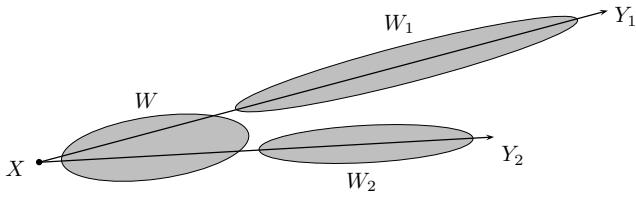


Fig. 4. Physical argument of common propagation area for correlation in shadowing.

whether these observations are statistically significant. Also, we suspect that negative correlations in measurements may appear in a particular obstacle scenario. However, averaged over very many obstacle realisations, the correlations are perhaps less likely to be negative.

- 5) h should be small for large θ , and approach zero for $\theta \approx 180^\circ$ and r_1, r_2 large, as the propagation regions are then essentially non-overlapping.
- 6) Continuity: a small change in \vec{r}_i should result in small changes in $h(\vec{r}_i, \vec{r}_j)$, at least when r_i is large.
- 7) Correlation should not depend on d only, as the distance between \vec{r}_1 and \vec{r}_2 tells us little about the overlap between the corresponding propagation areas.

Furthermore, it was argued [37], [38], [45], [56], [62], [72] that cross-correlation should depend on θ and R .

We have checked each model against these physical constraints, and summarised the results (without proof) in Table I. The only model that is both *psd* and fulfills all these physical criteria is the one we proposed based on [72], given by (27), (29), and (31), with $a = 1, b = 0$.

VIII. FEASIBILITY ACCORDING TO MARGINAL DISTRIBUTION

Until now, we have only verified whether a given model h gives *psd* covariance matrices \mathbf{K} . This is a necessary but not sufficient condition to ensure that a random vector \mathbf{S} can be constructed with covariance \mathbf{K} . To further study feasibility, it is necessary to look at the marginal distribution of S_i .

A. Jointly Lognormal Shadowing

In the most common case of lognormal shadowing (i.e., each S_i being Gaussian), a natural and effective way to model shadowing paths jointly is by making S_1, \dots, S_N jointly Gaussian. We then say that shadowing is jointly lognormal. In this case, every symmetric *psd* correlation matrix is feasible, by the following explicit construction:

We begin by solving for $\mathbf{C}_{N \times N}$ in

$$\mathbf{K} = \mathbf{CC}^T. \quad (43)$$

In general, there are many solutions to this equation if and only if \mathbf{K} is *psd*. Then, we generate an independent column vector of standard Gaussian random variables $\mathbf{Z} = [Z_1, \dots, Z_N]$, and obtain the shadowing terms with

$$\mathbf{S} = \mathbf{C}\mathbf{Z}. \quad (44)$$

There exist various algorithms for calculating \mathbf{C} . In the case when \mathbf{K} is positive definite, Cholesky factorisation is a stable algorithm [57], [97] that gives a triangular solution for \mathbf{C} . However, \mathbf{K} is allowed to be *psd* in general³. Also, numerical rounding can make \mathbf{K} slightly non-*psd*. To fix this double problem there are at least two procedures. One is to modify \mathbf{K} slightly so that it becomes positive definite [57]. However, \mathbf{K} need not be positive definite (as suggested in [43], [56], [57]), but may be *psd* in general. In this case, Cholesky factorisation is not applicable, and matrix diagonalisation (eigenvalue decomposition) [1], [7], [58], [95] should be used. Also, should some of the resulting eigenvalues of \mathbf{K} be slightly negative due to rounding, they can be set to zero [58]. Then, if there are eigenvalues equal to zero, \mathbf{K} is not full rank and therefore not positive definite, but \mathbf{C} can still be found. Additionally, if \mathbf{K} is highly-correlated, a fast approximation exists [98].

We may conclude that, for lognormal shadowing, it is only necessary for a model h to be *psd* for it to be possible to explicitly construct any number of correlated shadowing paths.

B. Non-Lognormal Shadowing

While lognormal is a well-established [8], [27], [73], [78], [86] and by far the most common model for the marginal distribution of shadowing, it is not the only one available. Other models have been proposed, either from physical plausibility arguments, or for easier mathematical tractability. The two other models that we have encountered for the distribution of e^{S_i} are truncated lognormal [86], [99] and Gamma [100]–[102]. See [86, Section V-B-4] for a survey of shadowing distribution measurements.

We have seen in Section III that the condition of finite variance of S_i is required for an adequate definition of correlation. For the truncated lognormal model, which corresponds to a truncated Gaussian S_i , it is easy to see that truncation reduces the variance, hence it is finite. For Gamma shadowing, it is easy to verify that all the moments of the logarithm of a Gamma random variable are finite, since they can be expressed as the integral 4.352.1 in [103].

It is, however, not evident that the vector \mathbf{S} can be generated according to non-Gaussian marginal distributions and a given *psd* correlation matrix \mathbf{K} . One constructive method for obtaining such jointly-distributed vectors is NORTA (Normal-to-Anything), described in [104]. This method requires some more stringent conditions on the marginal distributions to be feasible. These conditions might merit further study should non-lognormal shadowing models gain in popularity.

IX. CONCLUSION

We propose the criteria developed in this paper as a basis for evaluating, designing, and correcting existing future correlation models. Naturally, there is more to be said, both on testing more complex models for being *psd*, and on their physical plausibility.

³The case when \mathbf{K} is *psd* but not positive definite corresponds to a singular matrix. In practice, for randomly generated positions \vec{r}_i and using double-precision arithmetic, we find this event to be extremely rare [13], [14], and thus Cholesky factorisation is *almost* safe.

A. For Those Wanting to Incorporate Shadowing Correlation

For lognormal shadowing, only certain models that have the *psd* property (see Table I) guarantee to always give feasible joint shadowing distributions. For non-lognormal shadowing, some additional conditions might be required.

Based on both mathematical feasibility and physical arguments, we conclude that a subset of the family of models inspired by [72] is the best existing candidate for modeling correlation in shadowing. The model is given in (29), (27) with $a = 1, b = 0$, and (31). With two tunable parameters θ_0 and R_0 , it may be tuned to approximate many other correlation models that might have less desirable properties.

B. For Those Using a Model that Is Not Feasible

Models that are not *psd* may still be used in particular application scenarios. For example, all models give *psd* correlation matrices for $N = 2$. Also, we have argued that a correlation model that corresponds exactly to reality must per force be *psd*. It follows that for any model that approximates reality well (whether from extensive measurement campaigns, or from theoretical arguments), there exists a model that is close to it (according to some reasonable metric) while also being *psd*. For example, the authors in [72] fit the *psd* model (27) to the data of [24], to replace the non-*psd* model (25).

Our suggestion is to take non-*psd* models and correct them slightly to make them *psd*, as we have done for (33).

C. For Those Designing New Correlation Models

We suggest that all new correlation models be designed as *psd*, for the reasons described in Section I-A. Theorem 6 can be used to construct more detailed separable models.

ACKNOWLEDGMENT

We would like to thank the following people for valuable discussions that helped form this paper: Dr. Fabio Graziosi and Laura Imbriglio (University of l’Aquila, Italy), Dr. Marco di Renzo (University of Edinburgh, UK), Dr. Narcís Cardona and Dr. José Monserrat (Polytechnic University of Valencia, Spain), Renaud–Alexandre Pitaval (Aalto University, Finland).

REFERENCES

- [1] D. Kitchener, M. Naden, W. Tong, P. Zhu, G. Senarnath, H. Zhang, D. Steer, and D. Yu, “Correlated lognormal shadowing model,” IEEE 802.16 Session 44, San Diego, USA, Tech. Rep., July 2006.
- [2] N. Patwari and P. Agrawal, “Effects of correlated shadowing: Connectivity, localization, and RF tomography,” in *IEEE IPSN*, Apr. 2008, pp. 82–93.
- [3] B. Kasiri, M. Naderi, and B. Abolhassani, “A new realistic relay selection method based on correlated shadowing for multihop cellular networks,” in *IEEE ICCEE*, Dec. 2008, pp. 669–673.
- [4] F. Fabbri and R. Verdome, “The impact of correlated channel fluctuations on the connectivity of wireless ad-hoc networks,” in *IEEE VTC*, Apr. 2009.
- [5] J. H. Lee and R. M. Buehrer, “Location estimation using differential RSS with spatially correlated shadowing,” in *IEEE GLOBECOM*, to appear, Nov. 2009.
- [6] F. Graziosi, M. Pratesi, M. Ruggieri, and F. Santucci, “A multicell model of handover initiation in mobile cellular networks,” *IEEE Trans. Veh. Technol.*, vol. 48, no. 3, pp. 802–814, May 1999.
- [7] X. Yang, S. Ghaheri-Niri, and R. Tafazolli, “Downlink soft handover gain in CDMA cellular network with cross-correlated shadowing,” in *IEEE VTC*, vol. 1, Oct. 2001, pp. 276–280.
- [8] F. Graziosi and F. Santucci, “A general correlation model for shadow fading in mobile radio systems,” *IEEE Commun. Lett.*, vol. 6, pp. 102–104, Mar. 2002.
- [9] J. Kim and G. Stuber, “CDMA soft handoff analysis in the presence of power control error and shadowing correlation,” *IEEE Trans. Wireless Commun.*, pp. 245–255, Apr. 2002.
- [10] L.-C. Wang, G. Stuber, and C.-T. Lea, “Effects of Rician fading and branch correlation on a local-mean-based macrodiversity cellular system,” *IEEE Trans. Veh. Technol.*, vol. 48, no. 2, pp. 429–436, Mar. 1999.
- [11] J. Zhang and V. Aalo, “Effect of macrodiversity on average-error probabilities in a Rician fading channel with correlated lognormal shadowing,” *IEEE Trans. Commun.*, vol. 49, no. 1, pp. 14–18, Jan. 2001.
- [12] M. DeFaria and E. Sousa, “Effect of intercell interference on the SNIR of a multihop cellular network,” in *IEEE VTC*, vol. 5, May–June 2005, pp. 3107–3111.
- [13] S. S. Szyszkowicz and H. Yanikomeroglu, “Analysis of interference from large clusters as modeled by the sum of many correlated lognormals,” in *IEEE WCNC*, Mar.–Apr. 2008, pp. 741–745.
- [14] S. S. Szyszkowicz, F. Alaca, H. Yanikomeroglu, and J. S. Thompson, “Efficient simulation using shadowing fields of many wireless interferers with correlated shadowing,” in *IEEE VTC*, May 2010.
- [15] N. Gogate, D. Avidor, and S. Panwar, “Simulation study of a fixed wireless access system,” in *IEEE ICUPC*, vol. 1, Oct. 1998, pp. 209–215.
- [16] H. Haas, S. McLaughlin, and G. Povey, “An investigation on capacity versus guard-bands in the TDD mode of UMTS,” in *IEEE VTC*, vol. 4, Sept. 2000, pp. 1820–1824.
- [17] D. Avidor, N. Hegde, and S. Mukherjee, “On the impact of the soft handoff threshold and the maximum size of the active group on resource allocation and outage probability in the UMTS system,” *IEEE Trans. Wireless Commun.*, vol. 3, no. 2, pp. 565–577, Mar. 2004.
- [18] H. Arnold, D. Cox, and R. Murray, “Macroscopic diversity performance measured in the 800-MHz portable radio communications environment,” *IEEE Trans. Antennas Propag.*, vol. 36, no. 2, pp. 277–281, Feb. 1988.
- [19] S. Mukherjee and D. Avidor, “Effect of macrodiversity and microdiversity on outages and bit error rates in a cellular system,” in *IEEE WCNC*, vol. 2, Sept. 2000, pp. 649–654.
- [20] W. Hwang, H. Kang, Y. Choi, and K. Kim, “Effects of correlated shadowing and multipath fading on OFDM systems with postdetection-combining-based macrodiversity,” in *WPMC*, vol. 2, Oct. 2002, pp. 449–453.
- [21] S. Mukherjee and D. Avidor, “Effect of microdiversity and correlated macrodiversity on outages in a cellular system,” *IEEE Trans. Wireless Commun.*, vol. 2, no. 1, pp. 50–58, Jan. 2003.
- [22] Y. Chen, L. Hu, C. Yuen, Y. Zhang, Z. Zhang, and P. Rapajic, “Intrinsic measure of diversity gains in generalised distributed antenna systems with cooperative users,” *IET Commun.*, vol. 3, pp. 209–222, Feb. 2009.
- [23] C.-X. Wang, X. Hong, X. Ge, X. Cheng, G. Zhang, and J. Thompson, “Cooperative MIMO channel models: A survey,” *IEEE Commun. Mag.*, vol. 48, pp. 80–87, Feb. 2010.
- [24] V. Graziano, “Propagation correlations at 900 MHz,” *IEEE Trans. Veh. Technol.*, vol. 27, no. 4, pp. 182–189, Nov. 1978.
- [25] M. J. Marsan, G. C. Hess, and S. S. Gilbert, “Shadowing variability in an urban land mobile environment at 900 MHz,” *Electron. Lett.*, vol. 26, pp. 646–648, May 1990.
- [26] M. Gudmundsson, “Correlation model for shadow fading in mobile radio systems,” *IEE Electron. Lett.*, vol. 27, no. 23, pp. 2145–2146, Nov. 1991.
- [27] J. Liberti and T. Rappaport, “Statistics of shadowing in indoor radio channels at 900 and 1900 MHz,” in *IEEE MILCOM*, vol. 3, Oct. 1992, pp. 1066–1070.
- [28] A. Mawira, “Models for the spatial correlation functions of the (log)-normal component of the variability of VHF/UHF field strength in urban environment,” in *IEEE PIMRC*, Oct. 1992, pp. 436–440.
- [29] R. Stevens and I. Dilworth, “Mobile radio shadowing loss variability and co-channel signal correlation at 452 MHz,” *Electron. Lett.*, vol. 32, no. 1, pp. 16–17, Jan. 1996.
- [30] K. Butterworth, K. Sowerby, and A. Williamson, “Correlated shadowing in an in-building propagation environment,” *Electron. Lett.*, vol. 33, no. 5, pp. 420–422, Feb. 1997.

- [31] P. Taaghel and R. Tafazolli, "Correlation model for shadow fading in land-mobile satellite systems," *Electron. Lett.*, vol. 33, no. 15, pp. 1287–1289, July 1997.
- [32] T. Sorensen, "Correlation model for slow fading in a small urban macro cell," in *IEEE PMRC*, vol. 3, Sept. 1998, pp. 1161–1165.
- [33] K. Zayana and B. Guisnet, "Measurements and modelisation of shadowing cross-correlations between two base-stations," in *IEEE ICUPC*, vol. 1, Oct. 1998, pp. 101–105.
- [34] T. Sorensen, "Slow fading cross-correlation against azimuth separation of base stations," *Electron. Lett.*, vol. 35, pp. 127–129, Jan. 1999.
- [35] E. Perahia and D. Cox, "Shadow fading correlation between uplink and downlink," in *IEEE VTC*, vol. 1, May 2001, pp. 308–312.
- [36] E. Perahia, D. Cox, and S. Ho, "Shadow fading cross correlation between basestations," in *IEEE VTC*, vol. 1, May 2001, pp. 313–317.
- [37] J. Weitzen and T. Lowe, "Measurement of angular and distance correlation properties of log-normal shadowing at 1900 MHz and its application to design of PCS systems," *IEEE Trans. Veh. Technol.*, vol. 51, no. 2, pp. 265–273, Mar. 2002.
- [38] N. Jalden, P. Zetterberg, L. Garcia, and B. Ottersten, "Inter and intra site correlation of large scale parameters from macro cellular measurements at 1800 MHz," *EURASIP J. Wireless Communications and Networking*, July 2007.
- [39] N. Jalden, P. Zetterberg, and B. Ottersten, "Directional dependence of large scale parameters in wireless channel models," in *IEEE WCNC*, Mar.–Apr. 2008, pp. 1223–1228.
- [40] P. Dassanayake, "Spatial correlation of shadow fading and its impact on handover algorithm parameter settings," in *IEEE Networks Conference*, July 1995, pp. 225–229.
- [41] G. Malmgren, "On the performance of single frequency networks in correlated shadow fading," *IEEE Trans. Broadcast.*, vol. 43, no. 2, pp. 155–165, June 1997.
- [42] R. Fraile, J. F. Monserrat, J. Gozalvez, and N. Cardona, "Mobile radio bi-dimensional large-scale fading modelling with site-to-site cross-correlation," *Eur. Trans. Telecommun.*, vol. 19, pp. 101–106, Jan. 2008.
- [43] J. F. Monserrat, R. Fraile, D. Calabuig, and N. Cardona, "Complete shadowing modeling and its effect on system level performance evaluation," in *IEEE VTC*, May 2008, pp. 294–298.
- [44] B. Kasiri, M. Naderi, and B. Abolhassani, "The effect of correlated link shadowing on the performance of multihop cellular networks," in *IEEE ICCEE*, Dec. 2008, pp. 951–955.
- [45] R.-A. Pitaval, "Relay deployment in single frequency network," Master's thesis, Helsinki University of Technology, Aug. 2009.
- [46] D. Kaltakis, M. A. Imran, and R. Hoshyar, "Uplink capacity with correlated lognormal shadow fading," in *IEEE VTC*, Apr. 2009.
- [47] M. Di Renzo, F. Graziosi, and F. Santucci, "Cooperative spectrum sensing in cognitive radio networks over correlated log-normal shadowing," in *IEEE VTC*, Apr. 2009.
- [48] W. Lee and D.-H. Cho, "A new neighbor discovery scheme based on spatial correlation of wireless channel," in *IEEE VTC*, Apr. 2009.
- [49] A. Sible, "Efficient generation of spatially and frequency correlated random values for cognitive radio network simulators," *IEEE Trans. Veh. Technol.*, vol. 59, pp. 1121–1128, Mar. 2010.
- [50] D. Kotz, C. Newport, and C. Elliott, "The mistaken axioms of wireless-network research," Dept. of Computer Science, Dartmouth College, Tech. Rep., July 2003.
- [51] K.-J. Yang and Y.-R. Tsai, "Location tracking in mobile networks under correlated shadowing effects," in *IEEE WCNC*, Apr. 2009.
- [52] A. Ghasemi and E. Sousa, "Asymptotic performance of collaborative spectrum sensing under correlated log-normal shadowing," *IEEE Commun. Lett.*, vol. 11, no. 1, pp. 34–36, Jan. 2007.
- [53] A. Ghasemi and E. S. Sousa, "Fundamental limits of spectrum-sharing in fading environments," *IEEE Trans. Wireless Commun.*, vol. 6, no. 2, pp. 649–658, Feb. 2007.
- [54] M. Di Renzo, L. Imbriglio, F. Graziosi, and F. Santucci, "Cooperative spectrum sensing over correlated log-normal sensing and reporting channels," in *IEEE GLOBECOM*, to appear, Nov. 2009.
- [55] F. Graziosi, M. Pratesi, M. Ruggieri, and F. Santucci, "Modeling of handover initiation algorithms with correlated co-channel interferers," in *IEEE ICUPC*, Oct. 1997, pp. 244–248.
- [56] D. Avidor and S. Mukherjee, "Hidden issues in the simulation of fixed wireless systems," *Wirel. Netw.*, vol. 7, pp. 187–200, 2001.
- [57] J. F. Monserrat, R. Fraile, and L. Rubio, "Application of alternating projection method to ensure feasibility of shadowing cross-correlation models," *IET Electron. Lett.*, vol. 43, pp. 724–725, June 2007.
- [58] P. J. Rousseeuw and G. Molenberghs, "Transformation of non positive semidefinite correlation matrices," *Commun. Stat. A-Theor.*, vol. 22, pp. 965–984, 1993.
- [59] A. J. Viterbi, A. M. Viterbi, and E. Zehavi, "Other-cell interference in cellular power-controlled CDMA," *IEEE Trans. Commun.*, vol. 42, pp. 1501–1504, Feb/Mar/Apr 1994.
- [60] A. Viterbi, A. Viterbi, K. Gilhousen, and E. Zehavi, "Soft handoff extends CDMA cell coverage and increases reverse link capacity," *IEEE J. Sel. Areas Commun.*, vol. 12, no. 8, pp. 1281–1288, Oct. 1994.
- [61] F. Graziosi, "Analysis of outage duration for mobile radio networks with correlated shadowings," in *IEEE VTC*, vol. 2, May 1999, pp. 948–952 vol.2.
- [62] S. Mukherjee and D. Avidor, "Dynamics of path losses between a mobile terminal and multiple base stations in a cellular environment," *IEEE Trans. Veh. Technol.*, vol. 50, no. 6, pp. 1590–1603, Nov. 2001.
- [63] D. Avidor and S. Mukherjee, "Downlink dimensioning for the HSDPA standard," *Wireless Pers. Commun.*, vol. 32, no. 2, pp. 139–152, Jan. 2005.
- [64] C. Fischione, F. Graziosi, and F. Santucci, "Approximation for a sum of on-off lognormal processes with wireless applications," *IEEE Trans. Commun.*, vol. 55, no. 10, pp. 1984–1993, Oct. 2007.
- [65] D. S. Bernstein, *Matrix Mathematics: Theory, Facts, and Formulas with Application to Linear Systems Theory*. Princeton, NJ: Princeton University Press, 2005.
- [66] A. M. Yaglom, *Correlation Theory Of Stationary And Related Random Functions, Volume 1: Basic Results*. Springer-Verlag, 1987.
- [67] Z. Wang, E. Tameh, and A. Nix, "Joint shadowing process in urban peer-to-peer radio channels," *IEEE Trans. Veh. Technol.*, vol. 57, pp. 52–64, Jan. 2008.
- [68] P. Agrawal and N. Patwari, "Correlated link shadow fading in multi-hop wireless networks," *IEEE Trans. Wireless Commun.*, vol. 8, no. 8, pp. 4024–4036, Aug. 2009.
- [69] C. Oestges and D. Vanhoenacker-Janvier, "A physical-statistical shadowing correlation model and its application to low-Earth-orbit systems," *IEEE Trans. Veh. Technol.*, vol. 50, no. 2, pp. 416–421, Mar. 2001.
- [70] O. Ekici and A. Yongacoglu, "The effect of correlated shadowing on power control error in satellite CDMA systems," in *IEEE VTC*, vol. 4, May–June 2005, pp. 2643–2647.
- [71] C. Oestges and D. Vanhoenacker-Janvier, "Time series-based prediction of fade dynamics and shadowing correlation statistics for navigation systems," in *EuCAPP*, Nov. 2007, pp. 1–6.
- [72] T. Klingeborn and P. Mogensen, "Modelling cross-correlated shadowing in network simulations," in *IEEE VTC*, vol. 3, Sept. 1999, pp. 1407–1411.
- [73] S. Saunders and A. Aragón-Zavala, *Antennas and Propagation for Wireless Communication Systems*, 2nd ed. John Wiley & Son, 2007.
- [74] K. Yamamoto, A. Kusuda, and S. Yoshida, "Impact of shadowing correlation on coverage of multihop cellular systems," in *IEEE ICC*, vol. 10, June 2006, pp. 4538–4542.
- [75] R. Fraile, J. Nasreddine, N. Cardona, and X. Lagrange, "Multiple diffraction shadowing simulation model," *IEEE Commun. Lett.*, vol. 11, pp. 319–321, Apr. 2007.
- [76] H. Kim and Y. Han, "Enhanced correlated shadowing generation in channel simulation," *IEEE Commun. Lett.*, vol. 6, no. 7, pp. 279–281, July 2002.
- [77] Z. Lin, X. Peng, K. B. Png, and F. Chin, "Kronecker modelling for correlated shadowing in UWB MIMO channels," in *IEEE WCNC*, Mar. 2007, pp. 1583–1587.
- [78] A. Goldsmith, L. Greenstein, and G. Foschini, "Error statistics of real-time power measurements in cellular channels with multipath and shadowing," *IEEE Trans. Veh. Technol.*, vol. 43, no. 3, pp. 439–446, Aug. 1994.
- [79] N. B. Mandayam, P.-C. Chen, and J. M. Holtzman, "Minimum duration outage for cellular systems: A level crossing analysis," in *IEEE VTC*, vol. 2, Apr. 1996, pp. 879–883.
- [80] R. Vijayan and J. Holtzman, "A model for analyzing handoff algorithms," *IEEE Trans. Veh. Technol.*, vol. 42, no. 3, pp. 351–356, Aug. 1993.
- [81] D. Giancristofaro, "Correlation model for shadow fading in mobile radio channels," *Electron. Lett.*, vol. 32, no. 11, pp. 958–959, May 1996.
- [82] A. A. Abu-Dayya and N. C. Beaulieu, "Outage probabilities in the presence of correlated lognormal interferers," *IEEE Trans. Veh. Technol.*, vol. 43, pp. 164–173, Feb. 1994.
- [83] S. S. Szyszkowicz and H. Yanikomeroglu, "Limit theorem on the sum of identically distributed equally and positively correlated joint lognormals," *IEEE Trans. Commun.*, vol. 57, no. 12, pp. 3538–3542, Dec. 2009.

- [84] M. Pratesi, M. Ruggieri, F. Graziosi, and F. Santucci, "Performance of signal strength handover algorithms with interference and correlated shadowings," in *IEEE VTC*, vol. 2, May 1997, pp. 530–534.
- [85] D. Baum, J. Hansen, and J. Salo, "An interim channel model for beyond-3G systems: extending the 3GPP spatial channel model (SCM)," in *IEEE VTC*, vol. 5, May–June 2005, pp. 3132–3136.
- [86] J. Salo, L. Vuokko, H. M. El-Sallabi, and P. Vainikainen, "An additive model as a physical basis for shadow fading," *IEEE Trans. Veh. Technol.*, vol. 56, pp. 13–26, Jan. 2007.
- [87] I.-K. Fu, C.-F. Li, T.-C. Song, and W.-H. Sheen, "Correlation models for shadow fading simulation," IEEE C802.16m-07/060, Tech. Rep., Mar. 2007.
- [88] W. Ni, W. Zou, and H. Wang, "Modeling of spatially cross-correlated shadow fading in distributed radio access networks," in *IEEE ICC*, May 2008, pp. 4472–4476.
- [89] N. B. Mehta, A. F. Molisch, J. Wu, and J. Zhang, "Approximating the sum of correlated lognormal or, lognormal-Rice random variables," in *IEEE ICC*, vol. 4, June 2006, pp. 1605–1610.
- [90] A. Algans, K. Pedersen, and P. Mogensen, "Experimental analysis of the joint statistical properties of azimuth spread, delay spread, and shadow fading," *IEEE J. Sel. Areas Commun.*, vol. 20, no. 3, pp. 523–531, Apr. 2002.
- [91] D. Catrin and R. Mathar, "Gaussian random fields as a model for spatially correlated log-normal fading," in *IEEE ATNAC*, Dec. 2008, pp. 153–157.
- [92] M. Haleem, D. Avidor, and R. Valenzuela, "Fixed wireless access system with autonomous resource assignment," in *IEEE PIMRC*, vol. 3, Sept. 1998, pp. 1438–1442.
- [93] K. Sayrafian-Pour and D. Kaspar, "A novel model-based indoor positioning using signal strength," in *IEEE PIMRC*, Sept. 2007, pp. 1–5.
- [94] D. Kaltakis, "Fundamental limits of GCMAC with fading," Ph.D. dissertation, University of Surrey, Aug. 2009.
- [95] X. Yang and R. Tafazolli, "A method of generating cross-correlated shadowing for dynamic system-level simulators," in *IEEE PIMRC*, vol. 1, Sept. 2003, pp. 638–642.
- [96] S. Saunders and B. Evans, "The spatial correlation of shadow fading in macrocellular mobile radio systems," in *IEE Colloquium on Propagation Aspects of Future Mobile Systems*, Oct. 1996, pp. 2/1–2/6.
- [97] N. J. Higham, "Analysis of the Cholesky decomposition of a semi-definite matrix," in *Reliable Numerical Computation*. University Press, 1990, pp. 161–185.
- [98] J. Geist, "Computer generation of correlated Gaussian random variables," *Proc. IEEE*, vol. 67, no. 5, pp. 862–863, May 1979.
- [99] B. Hochwald, T. Marzetta, and V. Tarokh, "Multiple-antenna channel hardening and its implications for rate feedback and scheduling," *IEEE Trans. Inf. Theory*, vol. 50, pp. 1893–1909, Sept. 2004.
- [100] I. Kostic, "Analytical approach to performance analysis for channel subject to shadowing and fading," in *IEE P-Commun.*, vol. 152, no. 6, Dec. 2005, pp. 821–827.
- [101] A. Abdi and M. Kaveh, "On the utility of gamma PDF in modeling shadow fading (slow fading)," in *IEEE VTC*, vol. 3, July 1999, pp. 2308–2312.
- [102] P. Shankar, "Macrodiversity and microdiversity in correlated shadowed fading channels," *IEEE Trans. Veh. Technol.*, vol. 58, no. 2, pp. 727–732, Feb. 2009.
- [103] I. S. Gradshteyn and I. M. Ryzhik, *Tables of Integrals, Series, and Products*, 7th ed. Academic Press, 2007.
- [104] M. C. Cario and B. L. Nelson, "Modeling and generating random vectors with arbitrary marginal distributions and correlation matrix," Dept. Industrial Engineering and Management Sciences, Northwestern University, IL, USA, Tech. Rep., Apr. 1997.



Sebastian S. Szyszkwicz received his B.A.Sc. in Electrical Engineering (specialising in Communications), at the University of Ottawa in 2003. He obtained his M.A.Sc. at Carleton University in 2007, where he is currently finishing his Ph.D., both in the fields of Wireless Communications. He is the recipient of the NSERC Canada PGS awards at the Masters and Ph.D. levels. In winter 2008, he was a visiting researcher at the University of Edinburgh, and has given several invited talks about his research at universities in Europe and Canada. His research focuses on wireless interference and lognormal shadowing, and the mathematical challenges therein.



Halim Yanikomeroglu received a B.Sc. degree in Electrical and Electronics Engineering from the Middle East Technical University, Ankara, Turkey, in 1990, and a M.A.Sc. degree in Electrical Engineering (now ECE) and a Ph.D. degree in Electrical and Computer Engineering from the University of Toronto, Canada, in 1992 and 1998, respectively. He was with the Research and Development Group of Marconi Kominikasyon A.S., Ankara, Turkey, from January 1993 to July 1994. Since 1998 he has been with the Department of Systems and Computer

Engineering at Carleton University, Ottawa, where he is now a Full Professor with tenure. His research interests cover many aspects of the physical, medium access, and networking layers of wireless communications with a special emphasis on multi-hop/relay/mesh networks and cooperative communications. He has co-authored around 100 papers in these research areas in the last 5 years. At Carleton University, he teaches graduate courses on digital, mobile, and wireless communications. In recent years, his research has been funded by Research In Motion (Canada), Huawei (China), Samsung (Korea), Nortel (Canada), Communications Research Centre Canada, and NSERC Canada. He is a recipient of the Carleton University Research Achievement Award in 2009, and the Carleton University Graduate Students Association Excellence Award in Graduate Teaching in 2010; he has been Carleton University's nomination for the NSERC Steacie Fellowship 2011. He has been involved in the steering committees and technical program committees of numerous international conferences in communications; he has also given about 20 tutorials in such conferences. He is a member of the Steering Committee of the IEEE Wireless Communications and Networking Conference (WCNC), and has been involved in the organization of this conference over the years, including serving as the Technical Program Co-Chair of WCNC 2004 and the Technical Program Chair of WCNC 2008. He was the General Co-Chair of the IEEE Vehicular Technology Conference held in Ottawa in September 2010 (VTC2010–Fall). He was an editor for IEEE Transactions on Wireless Communications (2002–2005) and IEEE Communications Surveys & Tutorials (2002–2003), and a guest editor for Wiley Journal on Wireless Communications & Mobile Computing. He was an Officer of the IEEE's Technical Committee on Personal Communications (Chair: 2005–06, Vice-Chair: 2003–04, Secretary: 2001–02), and he was also a member of the IEEE Communications Society's Technical Activities Council (2005–06). He is an adjunct professor at King Saud University's Advanced Technology Research Center (Riyadh, Saudi Arabia). He is a member of the Carleton University Senate; he is also a registered Professional Engineer in the province of Ontario, Canada.



John Thompson received his B.Eng. and Ph.D. degrees from the University of Edinburgh in 1992 and 1996, respectively. From July 1995 to August 1999, he worked as a postdoctoral researcher at the University of Edinburgh, funded by the U.K. Engineering and Physical Sciences Research Council (EPSRC) and Nortel Networks. Since September 1999, he has been a Lecturer at the School of Engineering and Electronics at the University of Edinburgh. In October 2005, he was promoted to the position of Reader. His research interests cur-

rently include signal processing algorithms for wireless systems, antenna array techniques and multi-hop wireless communications. He has published approximately 160 papers to date including a number of invited papers, book chapters and tutorial talks, as well as co-authoring an undergraduate textbook on digital signal processing. He is the founding editor-in-chief of the IET Signal Processing journal. He is a technical programme co-chair for IEEE Globecom 2010 to be held in Miami and also served in the same role for the IEEE International Conference on Communications (ICC), held in Glasgow in June 2007.