

GAMING AND SIMULATION FOR ENERGY SYSTEM INFRASTRUCTURE: A CASE OF THE POWER GRID SYSTEM

Ange-Lionel Toba

Department of Engineering Management & System
Engineering

Old Dominion University

5115 Hampton Blvd

Norfolk, VA, USA

dtoba@odu.edu

Mamadou Seck

Department of Engineering Management & System
Engineering

Old Dominion University

5115 Hampton Blvd

Norfolk, VA, USA

mseck@odu.edu

Issakar Ngatang

Department of Modeling, Simulation, and Visualization Engineering

Old Dominion University

5115 Hampton Blvd

Norfolk, VA, USA

Ingat001@odu.edu

ABSTRACT

The provision and distribution of electricity are necessary for the good functioning of society. According to the US Department of Energy (2015), the electricity systems should be (1) reliable, (2) economically competitive and (3) environmentally responsible. Such a vision is not easily achievable, as these qualities may be in conflict with one another. Power system models are essential to simulate changes in the system and help resolve or mitigate conflicts. In this study, we present a gaming simulation, built upon a bottom-up discrete-event system model, to simulate the behavior and interactions of the main components in a power grid, forming various architecture scenarios. To develop this framework, we consider three main actions which the player can take, namely *build*, and *retire*, to work toward an architecture with a more balanced weight of grid quality.

Keywords: gaming, simulation, energy planning

1 INTRODUCTION

The power grid system is a highly complex and heavily utilized network of components supplying, delivering and consuming electricity (IPCC 2007). This system is composed of generation stations which produce electrical power, transmission lines, which transport it from distant sources to demand centers, and distribution hubs which provide power to customers (Kaplan 2009). Throughout the world, it is one of the most densely driven networks (IEA 2016), yet its capacity has to increase further, due to the growing needs. Improvements in capacity management is increasingly difficult, given the urgent need to diversify energy resources, which requires a more elaborate and integrated planning process, taking into account the demand

for electricity, flexibility to market changes, energy provision reliability, environmental impact reduction, and risk management of strategies considered (TVA 2015).

Existing systems of power provision and delivery need to change significantly, in order to address what the World Energy Council calls the “energy trilemma”: Ensure access to affordable (power should be generated and delivered in the least expensive manner), reliable (power should be delivered whenever, wherever and in whatever quantity needed), and sustainable (power should be generated with the least emission possible) energy for all (WEC 2016). Recent and anticipated trends indicate that renewable resources, particularly wind and solar energy, will be of a consistently growing contribution to global power systems (Mai et al. 2013). Formerly marginal renewable technologies like wind and solar are becoming mature and cost effective enough to justify grid scale investments (Khare, Nema et al. 2013).

Power grids must therefore adapt to handle renewable sources, which are unpredictable, and do not always produce as expected. This constitutes a reliability issue. A grid with 100% renewable would present low costs, as these sources have no fuel costs, but may not provide the amount of power needed, at the time and location needed. In such case, back up plants, which are mostly from conventional sources, are required. This will make the network less vulnerable to eventual drops in power generation from renewable. While such a grid will gain in reliability, it will lose in costs, as operating costs of conventional sources include fuel costs. In addition, there are also transmission costs that need to be accounted for.

The vulnerability of the electric power grid depends on its architecture, but also on the energy mix. Decentralized architectures systems are systems where components have some ability to operate “locally” (Johnson 1999), that is, components can make decision without a centralized control. In a power system composed of several zones, every zone would function independently of the other. Generators in this design would be built closer to consumers. They would include small- or medium scale, environmentally-friendly and traditional fossil fuel technologies primarily to serve a single area. This design increases the vulnerability of the grid, in case of break downs, and may lead to generalized power outage (Marnay and Venkataramanan 2006). Centralized infrastructure systems, rather have a central component that exercises control over lower-level components of the system (Bekey 2005). In a power system composed of several zones, certain zones may not be able to independently function (satisfy local demand) without others. In such system, power is generated in bulk, from a central unit, located at the point of best resource availability, and mostly away from end-users. Generators are mostly large scale and designed primarily to serve multiple and remote areas. They would offer improved local reliability (Zeriffi, Dowlatabadi, and Farrell 2007).

Energy planners have the task of designing an infrastructure power system to provide electricity to population, at a given set of locations. Eventual actions may include the (1) increase in redundancy and capacity of current generating units, or (2) decrease of the reliance on transmission by furthering the use of more distributed generation (Albert, Albert, and Nakarado 2004). Deciding the option to take will have serious implications given that the power system reliability and the future shape of that system are at stake. These implications may yield deeper insight into complex issues, namely expansion of power system infrastructure, or its potential transformation over time. What type of architecture is needed, if the objectives are, not only to minimize costs, but also minimize environmental effects and maximize reliability? This issue is even more pressing now that nations across the globe are heavily investing in the use of renewable sources to match the rising demands (IEA 2014).

Gaming simulation has evolved to become the most apt tool for designing computer-mediated interaction among policy makers (Meijer 2009). One of its essential features is the ability to bring together the system’s technical complexity with socio/political complexity surrounding decisions (Mayer 2009) and enable the player to find the balance. To some extent, gaming makes up for the weakness felt in Modeling and Simulation, that is, the lack of transparency in certain energy systems models (Dodds, Keppo, and Strachan 2015). It has the ability to open up the black box and help improve policy-oriented learning (Cecchini and Rizzi 2001). The player is immersed in an experiential learning environment, which provides him with

clues to identify sensitive conditions of the system operation, a sense of what (not) to do to attain the objective, as well as short-term and long-term repercussions.

Learning is a key objective of simulation games (Girard, Ecalle, and Magnan 2013; Padilla et al. 2016). Via experiments and scenarios, the player can grasp the underlying mechanism of the system and eventually explain the changes occurring. In the gaming sessions, players will be able to identify key elements of the power system, and eventually assess their (in) direct influences. Dray et al. (2007) argue that in these sessions, tacit knowledge is made explicit through the players' choices of action, furthering the understanding of the deep lying connections between components of the system.

In this study, the player is confronted with the task of designing a grid which would present the best balance between reliability, sustainability and affordability. Three options are available to modify the architecture of the power system: *retire*, and *build*. *Retire* refers to shutting down generating and storage units. *Build* refers to building a new power plant, storage unit, or transmission line. These decisions can be taken in isolation or as a group. This paper presents a sample game scenario promoting actions at the network level, in order to take full advantage of transmission lines and large scale renewable. We hope to stimulate new reflections to help understand the impact of different power grid architectures on economic, environmental and reliability performances.

Section 2 gives a brief definition of the concept of gaming simulation. In section 3, we present the underlying model used for the simulation, and discuss its characteristics. In section 4, we present a game session where players have the opportunity to interact with the game. Section 5 and 6 propose a brief discussion regarding the bien-fondé of this approach, and a conclusion, respectively.

2 GAMING SIMULATION

According to Bratley, Fox, and Schrage (2011), simulation is the act of “driving a model of a system with suitable inputs and observing the corresponding outputs”. Simulation thus involves, not only modeling, but also experimenting. A model is a simplified representation of the real system, specified in space and time (Phan and Butler 2008). After the model is designed, it is executed over time via simulation. Simulating the model would help analyze its behavior through experiments and reach some understanding. It displays the variations of the state of the model's variables over time and ultimately evaluates the performance of the system, under different configurations (Maria 1997).

Gaming is a form of play, in which players have objectives to reach and roles, that is, they take responsibility through fictional characters to act, via a process of structured decision-making (Cover 2010). Gaming offers fair rules and clear goals, as well as incentives or winning prizes to learn from mistakes and eventually develop the knowledge and skills necessary to fulfill the pursued goals.

Adding gaming to simulation means adding human interaction to control experiments and increase validity (van den Hoogen and Meijer 2015). A gaming simulation becomes a model of reality, with the roles, rules, objectives and constraints similar to the real world. The behavior observed in a game session is therefore a somehow faithful representation of the behavior of decision makers in the real world. It is a simulation of the repercussions of decisions made by actors holding roles and prerogatives with explicit references to aspects and structures that realistically express the existing infrastructure and resources (Kriz 2003). Gaming simulation would thus serve as a tool for bringing diverse insights together, laying out various approaches to a problem and allowing different alternative to be experimented in a safe environment (Meijer 2012). In the case of this study, actions taken by players convey the need for the grid to be as reliable, environmentally friendly and as affordable as possible. However, ways to arrive at that point, if at all possible, would vary, given the different perspectives of the players. The goal here is to simulate the actors' decision-making process and show the consequences within the system.

Currently, not many simulation games are available, in the area of utility management and planning. Cesim Business Simulation Games (Cesim 2010) propose the ‘*Cesim SimPower*’, which is a web-based electric

utility management simulation game, focusing on the dynamic behavior of the electricity markets. The game is played in teams, that compete against each other, to deliver the most sustainable and profitable growth in the market. Although relevant, this game is not in alignment with the goal we are pursuing. The '2050 Vision: Energy Challenge,' was created by Duke Energy (Duke Energy 2014). The main objectives are to meet customers growing demand for energy and reduce the carbon emissions released by power plants. The players can (1) build new power plants, (2) upgrade and/or retrofit current power plants, (3) close current power plants or (4) implement new energy efficiency programs. Although players can add power plants, they cannot specify their capacity. Also, (1) the transmission system, storage units, and hydro technology are not included, and (2) utilization rates of plants are not accounted for, which might limit the quality of decisions made by the players. The 'Energy City' game created by JASON Digital Lab Project (Jason Project 2011) has for objective to "craft an urban energy portfolio that balances economic, social, and environmental issues...all while negotiating with stakeholders and generating enough power to support a growing population". Here too, the players can (1) build new power plants and (2) decide on the type of plant to use to meet the demand. Though fun, this game presents the same limitations, bar the inclusion of hydro technology, as the previous game cited.

Those last 2 games offer a great deal of entertainment, which is key, Schell (2005) points out, as it provides, among other important aspects, a cornerstone of discovery. They appear to be running seemingly simplistic situations and scenarios, some hypothetical, where the outputs are computed based on decisions made by the player, updating the energy mix, adding costs, computing the emissions, etc. Evidently, entertainment has to be the 1st step to engage in learning. What needs to be included is a more faithful representation of a grid, in order to generate learning at a deeper level. The awareness for a more sustainable grid could not be raised in a better way. We propose a simulation-based game that not only attempt to engage learners with challenging objectives to reach, but also to offer a more serious representation of the grid and key metrics, for the player to have, both critical information to develop more informed strategies, and a more advanced understanding of the grid operations.

3 POWER SYSTEM MODELING

Building a gaming simulation platform follows three steps: (1) model the real system, (2) enable and facilitate human interaction while controlling the research environments via scenarios, and (3) identify outcomes of the system that may warrant actions from decision makers (Lo, Van Den Hoogen, and Meijer 2013). It is therefore critical to build a good model, as it will determine the credibility of the results and the confidence of players or decision makers to adhere to the reasonableness of these results. As modelers, the most important task is to balance model details and system complexities (Dodds, Keppo, and Strachan 2015), that is, make sure the model captures all salient components and phenomenon of the system in a simple and realistic manner.

In practice, a good model is the one which strikes the right balance. In our effort to reach this goal, we follow the requirements suggested by Mader, Wupper, and Boone (2007), to build our power system model. The model used is *Spark!* See Toba et al. (2017a) for more details about assumptions and hypothesis used in the model.

Object of modelling — what does the model describe? *Spark!* describes the behavior of the power system.

Purpose — what is the model purpose? *Spark!*'s main goal is to perform energy planning, by analyzing expansion plans on a long term while also performing day-to-day activities of the system, on the short term.

Traceability & Truthfulness — are key properties and components of the system represented in the model? *Spark!* captures the intermittence and stochastic nature of renewable energy resources, the technical constraints of conventional generation resources, geographical information, transmission network system and operating reserves. It also captures the salient components of the power grid, namely supply, load, transmission and distribution. In addition, the model performs a security constrained unit

commitment with a flexible look-ahead period, and a stochastic economic dispatch, using an enhanced Priority List method.

Extensibility and reusability — can the model be used beyond its original purpose and are its output replicable? *Spark!* is developed in the python language following the DEVS framework, using the PythonPDEVS library of components. These model components are instances of generic Python® classes, representing the components present in a power system. This way, the model does not only describe the specific system at hand, but also, given appropriate instantiation and scaling, is able to model systems of similar nature.

4 LET THE GAME COMMENCE

4.1 Game Structure

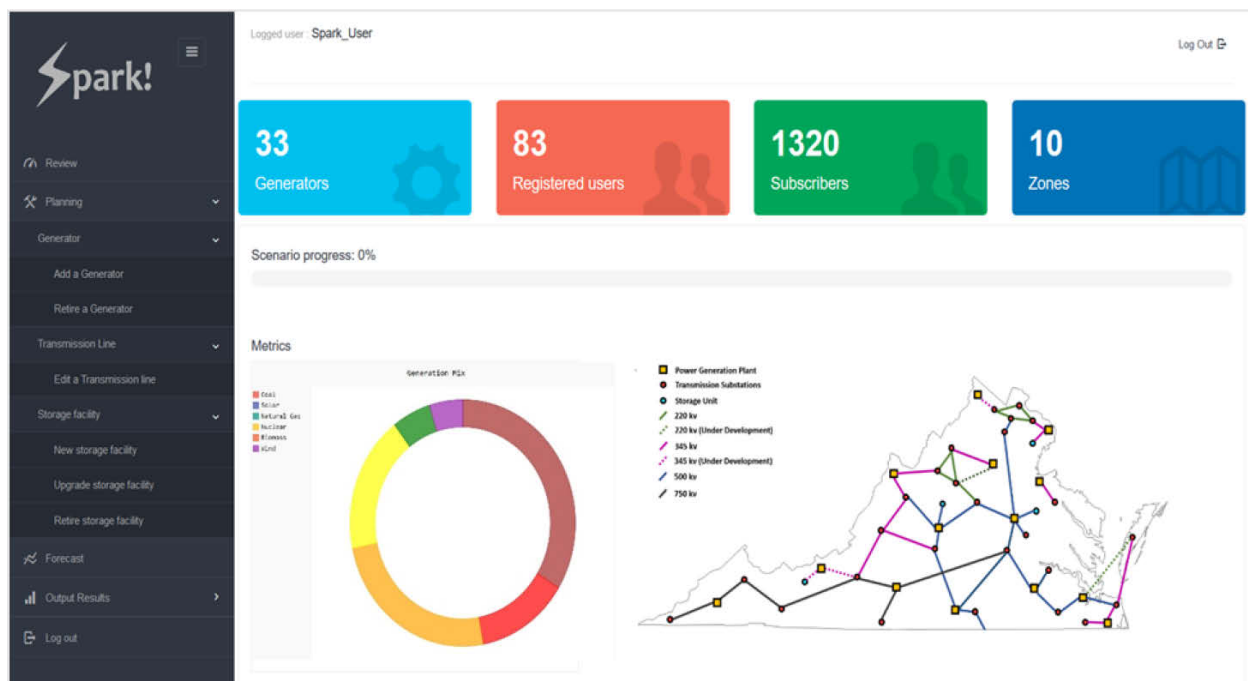


Figure 1: Game interface (Toba et al. 2017b)

The players interact with the gaming platform, via an interface (Figure 1). They can log in and out using personalized data. Bars at the top provide general information regarding the current grid (e.g. number of generator and zones), and the number of registered users (other players) and online subscribers. On the left, the panel displays options available to the player. Under the tab planning, players can choose to add new constructions, retire and/or upgrade generation, transmission as well as storage assets. On the lower right corner of the panel, the map reflects the changes in the grid architecture. The pie chart in the metrics panel displays the generation mix, that is, the proportions of technology generation type composing the total supply used to fulfill the demand in the whole network. The scenario progress bar indicates how far in the scenario the player is. If a scenario is ten years long, every year of simulation will count for 10% in the scenario progress bar.

Figure 2 illustrates the structure of the game. Players can take actions as only allowed by the game rules. The player's decisions represent inputs. In figure 3, players for instance, decide to build a new power plant. Input are data entered by the player, specifying zone, name, technology type and capacity of the plant to be built. Once entered, the grid is simulated via *Spark!*, and resulting performance are computed. The outputs are displayed on the interface to allow players to assess the implications of their actions.

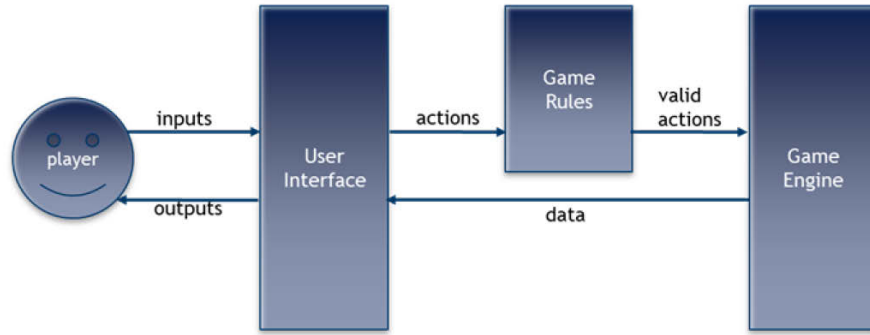


Figure 2: Structure of the game

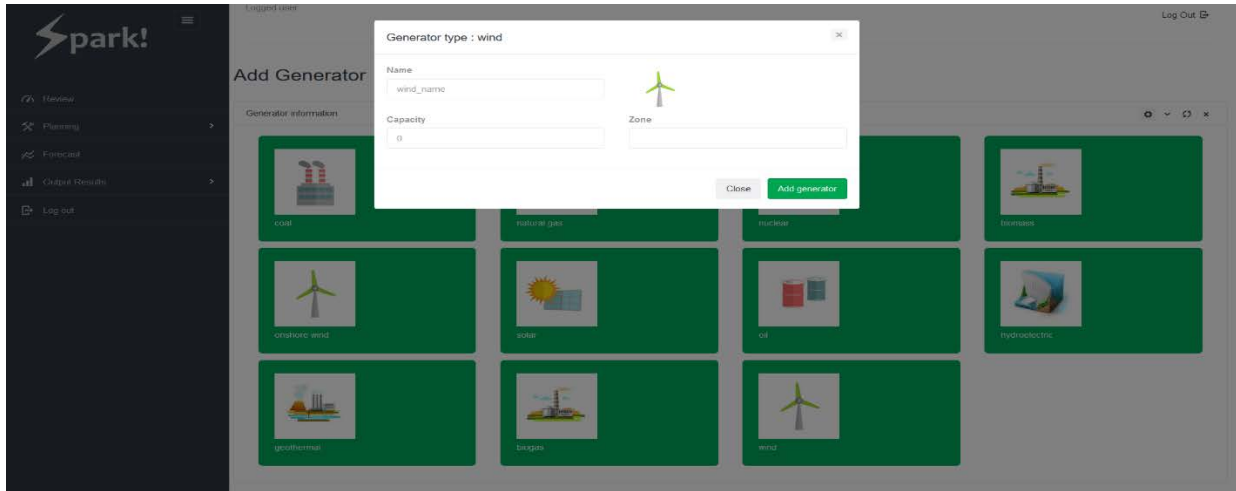


Figure 3: Building a power plant

4.2 Game Session

In each session, the player is presented with a specific situation. For illustration purposes, we present a grid with 33 power plants, with various power generation technology including natural gas, biomass, coal, solar, nuclear, biogas, hydro and oil. In this game scenario, transmission lines capacity is considered limitless, that is, electricity can be exchanged between zones, as much as there is. A zone is considered to be a location with a specific load pattern, a distribution system and a generation fleet. The grid network is composed of several zones. The scenario simulation run is 8 years, with human interaction taking place at the beginning of every year. Players are presented with an initial grid, with a specific generation mix. The goal of the game is for the player to create a grid with maximal profit and minimal emissions. The player does so by *adding* or *retiring* power plants. A plant added is assumed to be available in the same year for subsequent simulation run. The player is provided with information regarding fuel costs, capital costs, fixed and variables costs as well as emission rates for each generation technology, so as to help him in the decision making.

The formulas used to computed the profit and the CO2 emissions are displayed below, in Eq1 and Eq2 respectively. Table 1 displays all the variables used. Table 2 displays all the sets used in our equations, which correspond to the indices used in variables.

$$\text{profit} = \sum_{g,h} \text{revenue}_{g,h} - \sum_g \text{genCap}_g \times \text{oCapCost}_g - \sum_{g,y} \text{genCap}_g \times \text{fixCost}_{g,y} - \sum_{g,h} \text{opCost}_{g,h} - \sum_{g,h} \text{utlzCap}_{g,h} \times \text{omCost}_{g,h} \quad (1)$$

$$\text{emission} = \sum_{g,h} \text{eRate}_{g,h} \times \text{utlzCap}_{g,h} \times \text{hRate}_{g,h} \quad (2)$$

Table 1: List of variables

Name	Description
revenue	Income generated from sale of power
emission	Emission of Carbon dioxide
eRate	Emission rate per generator
hRate	Heat rate
genCap	Capacity of generators
fixCost	Fixed costs
oCapCost	Overnight capital costs
opCost	Operating costs
utlzCap	Utilized capacity
omCost	Operation and maintenance costs

Table2: List of set

Name	Description
g	Generator index
h	Time periods (hour in our case)
y	Year index

Table 3: Generation fleet of initial grid

Name	Zone	Type
Plant1	Valley	Biogas
Plant2	Valley	Biogas
Plant3	Valley	Biogas
Plant4	Valley	Coal
Plant5	Valley	Solar
Plant6	Hampton Roads	Coal
Plant7	Hampton Roads	Coal
Plant8	Hampton Roads	Coal
Plant9	Hampton Roads	Natural Gas
Plant10	Hampton Roads	Natural Gas
Plant11	Hampton Roads	Biomass
Plant12	Hampton Roads	Solar
Plant13	West Central	Coal
Plant14	West Central	Coal
Plant15	Northern	Natural Gas
Plant16	Northern	Nuclear

Table 4: Generation fleet of initial grid (Continued)

Name	Zone	Type
Plant17	Northern	Nuclear
Plant18	Northern	Nuclear
Plant19	Southside	Oil
Plant20	Southside	Oil
Plant21	Southside	Solar
Plant22	Southside	Hydroelectric
Plant23	Central	Biogas
Plant24	Central	Solar
Plant25	Southwest	Coal
Plant26	West Central	Nuclear
Plant28	West Central	Solar
Plant29	Eastern	Solar
Plant30	Eastern	Solar
Plant31	Eastern	Nuclear
Plant32	Eastern	Nuclear
Plant33	Eastern	Oil

Table 3 and 4 display the generation fleet in the initial grid. Figure 4 displays generation mix outputted to the player, with (1) being the mix of the initial grid, (2) the mix at year 2, (3) the mix at year 4, (4) the mix at year 6, and (5) the mix at year 8. The player attempts to reduce its nuclear energy, and at the same time increase the use of renewable. It leads to a more pronounced use of coal, given its relatively low capital investment and variable costs, compared to natural gas or nuclear. The use of oil also emerges as nuclear plants are phased out. The player also engages in the building of solar and hydro power, as the scenario evolves. These actions have economic implications. Figure 5 displays the overall financial performance of the grids designed by the player during this scenario. These represent profit/loss generated, considering all expenses made (capital costs, fuel costs, fixed and variable O&M costs) and revenues (costs at which electricity is sold). The profits are going down at year 2 and 4, with increased use of coal and oil, which reflect the high cost of transporting coal to centralized power plants and the expensive pipeline to reach

faraway markets. The profits later appear to remain relatively stagnant, with the use of hydroelectric sources and a slight reduction in oil use.

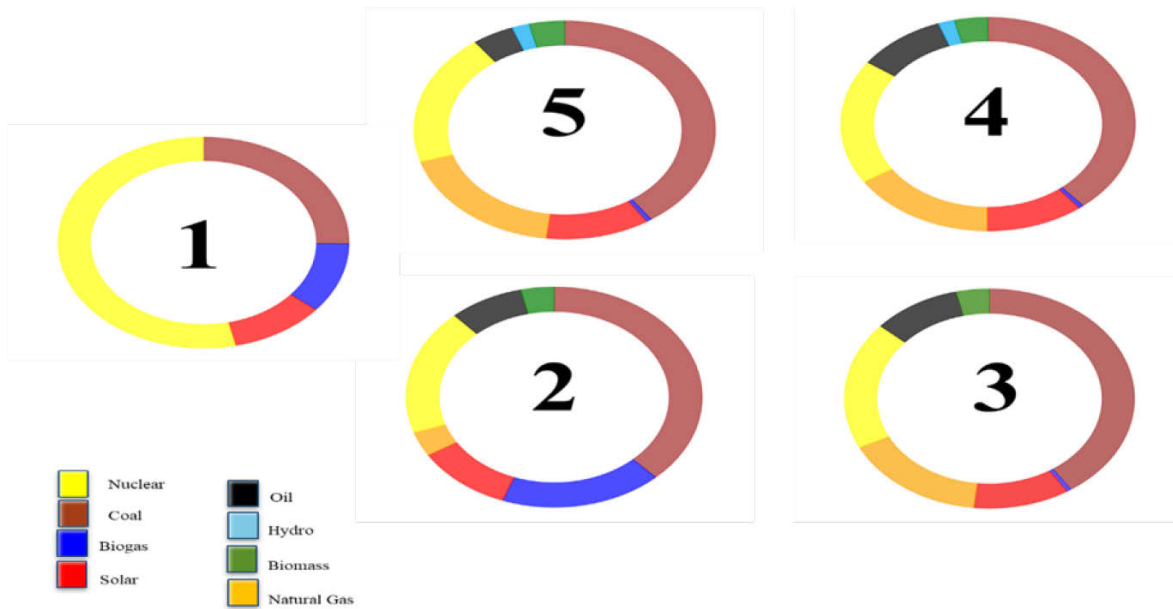


Figure 4: Generation mix

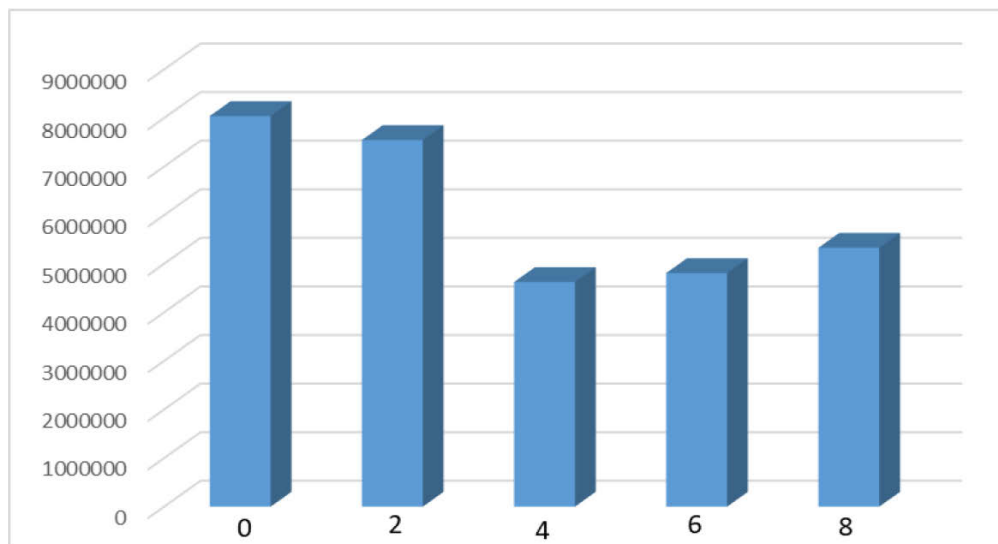


Figure 5: Financial performance of the grid (\$)

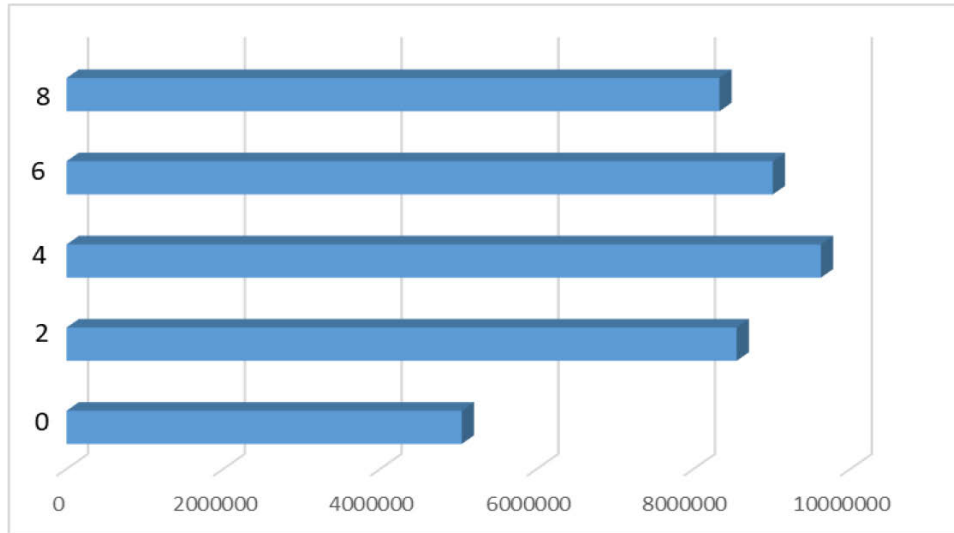


Figure 6: CO2 Emission (lbs)

The player can also have a sense of the amount of gas emissions, here CO₂ (carbon dioxide), caused by the generation fleet composing the grid (Figure 6). At year 2, the CO₂ emissions considerably go up, given the high use of coal, biogas and oil. Year 6 shows a slight decline considering the introduction of hydroelectric power and the reduction in use of coal. This decline is also felt at year 8 with less oil in the energy mix, and despite a small increase in use of natural gas.

5 DISCUSSION

Today's power sector is an extreme example of a co-evolving complex dynamic system in transition, characterized by path dependency, and changes in institutions, technological innovation, consumption pattern and environmental. Complex engineered systems, like power systems, come about as a result of historical, institutional and behavioral lock-ins and path-dependent technological development trajectories (Simmie 2012, Fouquet 2016). Current decision-making on strategic planning is thus made up of outcomes from past choices, even though they may no longer be relevant, and several other factors which behavior or future changes may be unknown. Decision makers are constrained in their ability to take actions, by (1) a limited, often unreliable, information concerning possible alternatives and their implications, (2) a limited capacity to understand available information, and (3) a limited amount of time, with the expectation of a satisfactory outcome. It is critical to understand, or at least strive to, how power infrastructure systems co-evolve with Society (populations, policy, institutions, economy, etc.) and nature (resources, ecosystems), and understand how best influence this co-evolution. One avenue would be to balance the needs expressed by society and the resources available, or at least, examine situations in which this balance or stability can be reached, if at all possible. We posit that gaming simulation is an effective way of developing this avenue.

The gaming simulation approach used in this research, is to teach/learn key concepts in power system management, namely *reliability*, *affordability* and *environmental responsibility*. It is intended to familiarize players with the whole decision-making environment for an electric utility, and help them develop capabilities in implementing, and adapting strategies in a dynamic competitive environment. Players could use the game as an experimental setting, providing, not only insight into the functioning and operations of a grid, but also context to improve skills in resource planning through rules, roles and various scenarios. It is our expectation, using this approach, to draw all generations of learners to become more excited about the power sector. More importantly, we hope this framework can help raise awareness of the complexities enclosed in power grid operations for future generations to come. The game focuses on the competing objectives, designed here as performance of the system, namely environment, costs and reliability. The race for use of renewable sources is fierce and may lead to design choices that are not always the least costly or

most reliable. The platform presented captures this aspect of the system and provides the player options to mitigate conflicts, in a fun and learning environment. The player is exposed to a multitude of decision factors, affecting, not only the organization of information but also its understanding. This shapes learning.

6 CONCLUSION

This paper documents efforts in teaching power system planning via gaming simulation. It is argued that simulation gaming provides an entry point, not only for novice, but also experts (Padilla et al. 2016), in the field of energy system management. With mounting demand for power, challenges linked with supply, and concerns over sustainability, there is an undeniable need to ensure that practitioners and new learners gain a holistic comprehension of concepts relevant to energy management. A scenario is presented, in which a player takes action in order to build a grid that is environmentally friendly, least costly and reliable. The player is placed in a gaming environment, where real situations are replicated, and implications are readily assessed.

Future work includes a more systematic process to evaluate the effectiveness of simulation-based gaming for energy systems questions in order to assess the contribution of this approach to problem solving. It could help get information about how realistic the game is, and what could be added to position gaming simulation as a bridge between laboratory and field experiments.

REFERENCES

- Albert, R., Istvan Albert, and Gary L. Nakarado. 2004. "Structural vulnerability of the North American power grid." *Physical review E* vol. 69, no. 2, pp. 025103-025113.
- Bekey, G. A. 2005. *Autonomous robots: From biological inspiration to implementation and control*, MIT press.
- Bratley, P., B. Fox, L., and L. E. Schrage. 2011. *A guide to simulation*, Springer Science & Business Media.
- Cecchini, A. and P. Rizzi (2001). "Is Urban Gaming Simulation Useful?" *Simulation & Gaming* vol.32, no. 4, pp. 507-521.
- Cesim. 2010. *Cesim SimPower: On-line Business Simulation for Electric Utilities*. Available via <https://cesimfrance.files.wordpress.com/2010/05/microsoft-powerpoint-simpower-introduction-1.pdf>. Accessed Feb. 15, 2018.
- Cover, J. G. 2010. *The Creation of Narrative in Tabletop Role-Playing Games*, McFarland.
- Dodds, P. E., Ilkka Keppo, and Neil Strachan. 2015. "Characterizing The Evolution of Energy System Models Using Model Archaeology." *Environmental Modeling & Assessment* vol. 20, no. 2, pp. 83-102.
- DOE. 2015. *An Assessment Of Energy Technologies and Research Opportunities*, US Department of Energy.
- Dray, A., Pascal Perez, Christophe Le Page, Patrick D'Aquino, and Ian White. 2007. "Who Wants to Terminate The Game? The Role of Vested Interests and Metaplayers in the ATOLLGAME Experience." *Simulation & Gaming* vol. 38, no. 4, pp. 494-511.
- Duke Energy. 2014. *2050 Vision Energy Challenge*. Available via <http://energychallenge.duke-energy.com/>. Accessed Feb. 15, 2018.
- Fouquet, R. 2016. "Path Dependence in Energy Systems And Economic Development." *Nature Energy* 1: 16098.
- Girard, C., J. Ecalte, and A. Magnan. 2013. "Serious Games as New Educational Tools: How Effective Are They? A Meta-Analysis of Recent Studies." *Journal of Computer Assisted Learning* vol. 29, no. 3, pp. 207-219.

- IEA. 2016. *Large-Scale Electricity Interconnection: Technology and Prospects for Cross-regional Power Networks*. Paris, France, International Energy Agency.
- IEA. 2014. *World Energy Investment Outlook 2014 Special Report: International Energy Agency*.
- IPCC, 2007. *Climate Change 2007: Mitigation. Contribution of Working Group III to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change*, edited by Metz, B., O. R. Davidson, P. R. Bosch, R. Dave, and L.A. Meyer. Cambridge University Press, Cambridge, United Kingdom and New York, NY
- Jason Project. 2011. *Jason Science: Education through Exploration*. Available via http://gated.jason.org/digital_library/cfy/8239.aspx.
- Johnson, N. L. 1999. *Diversity in decentralized systems: Enabling self-organizing solutions*. Decentralization II Conference, UCLA.
- Kaplan, S. M. 2009. "Electrical Power Transmission: Background and Policy Issues. Government Series", *Congressional Research Service* pp. 1-42.
- Khare, V., Nema, S., & Baredar, P. (2013). "Status of solar wind renewable energy in India." *Renewable and Sustainable Energy Reviews*, vol. 27, pp. 1-10
- Kriz, W. C. 2003. "Creating Effective Learning Environments and Learning Organizations Through Gaming Simulation Design." *Simulation & Gaming* vol. 34, no. 4, pp.495-511.
- Lo, Julia, J. Van den Hoogen, and J. Sebastiaan Meijer. 2013. "Using Gaming Simulation Experiments to Test Railway Innovations: Implications for Validity". In *Proceedings of the 2013 Winter Simulation Conference*, edited by R. Pasupathy, S.-H. Kim, A. Tolk, R. Hill, and M. E. Kuhl. IEEE Press.
- Mader, A., H. Wupper, and M. Boon. 2007. "The construction of verification models for embedded systems", *Centre for Telematics and Information Technology*, vol. 1, no. TR-CTIT-07-02, University of Twente.
- Mai, T., Drury, E., Eurek, K., Bodington, N., Lopez, A., and Perry, A. "Resource Planning Model: An Integrated Resource Planning And Dispatch Tool for Regional Electric Systems". *Contract*, 303, 275-3000.
- Maria, A. 1997. "Introduction to modeling and simulation". In *Proceedings of the 29th conference on Winter simulation*, edited by D.J. Medeiros, E.F. Watson, J.S. Carson and M.S. Manivannan, Washington, DC, USA, IEEE Computer Society.
- Marnay, C. and G. Venkataramanan. 2006. "Microgrids in the evolving electricity generation and delivery infrastructure". In *Power Engineering Society General Meeting*, IEEE.
- Mayer, I. S. 2009. "The Gaming of Policy and the Politics of Gaming: A Review." *Simulation & Gaming* vol. 40, no. 6, pp. 825-862.
- Meijer, S. 2009. *The Organization of Transactions: Studying Supply Networks Using Gaming Simulation*, Wageningen Academic Publishers.
- Meijer, S. 2012. "Gaming Simulations for Railways: Lessons Learned From Modeling Six Games For The Dutch Infrastructure Management". In *Infrastructure Design, Signaling and Security in Railway*, edited by Xavier Perpinya. InTech.
- Padilla, J. J., Christopher J. Lynch, Saikou Y. Diallo, Ross J. Gore, and Anthony Barraco. 2016. "Using simulation games for teaching and learning discrete-event simulation". In *Proceedings of the 2016 Winter Simulation Conference*, edited by T. M. K. Roeder, P. I. Frazier, R. Szechtman, E. Zhou, T. Huschka, and S. E. Chick. IEEE Press.
- Phan, P. and J. E. Butler. 2008. *Theoretical Developments and Future Research in Family Business*. Charlotte, NC, Publisher: Information Age Publishing
- Simmie, J. 2012. "Path dependence and new path creation in renewable energy technologies." *European Planning Studies* vol. 20, no. 5, pp. 729-731.

- Schell, J. 2005. "Understanding entertainment: story and gameplay are one." *Computers in Entertainment (CIE)* vol. 3, no. 1, pp. 6-20.
- Toba, Ange-Lionel, Mamadou Seck, Matthew Amisshah, and Sarah Bouazzaoui. 2017a. "An Approach for DEVS Based Modeling of Electrical Power Systems". In *Proceedings of the 2017 Winter Simulation Conference*, edited by W. K. V. Chan, A. D'Ambrogio, G. Zacharewicz, N. Mustafee, G. Wainer, and E. Page. Las Vegas, NV, IEEE Press.
- Toba, Ange-Lionel, Nathapon Siangchokyooy, Mamadou Seck, and Issakar Ngatang. 2017b. "Simulation-Based Energy Management Game". In *CIGRÉ-US National Committee 2017 Grid of the Future Symposium*. Cleveland, OH.
- TVA. 2015. *2015 Integrated Resource Plan - TVA*, TENNESSEE VALLEY AUTHORITY.
- Van den Hoogen, J. and S. Meijer. 2015. "Gaming and simulation for railway innovation: A case study of the Dutch railway system." *Simulation & Gaming* vol. 46, no. 5, pp. 489-511.
- WEC 2016. World Energy Council Index: Benchmarking the Sustainability of National Energy Systems. Dowlatabadi, H., & Farrell
- Zerriffi, H., Dowlatabadi, H., & Farrell, A. (2007). Incorporating stress in electric power systems reliability models. *Energy Policy*, vo. 35, no. 1, pp. 61-75

AUTHOR BIOGRAPHIES

ANGE-LIONEL TOBA is a Ph.D. candidate and Graduate Research Assistant at the Engineering Management & Systems Engineering department, at Old Dominion University. His research interests include System Sciences and Systems modeling. His email address is dtoba@odu.edu

MAMADOU SECK is a Professor of Engineering Management and Systems Engineering at Old Dominion University. His research interests include Systems thinking and Simulation modeling. His email address is mseck@odu.edu

ISSAKAR NGATANG is a Ph.D. student and Graduate Research Assistant at the Modeling, Simulation and Visualization Engineering Department at Old Dominion University. His area of research is high-performance computing. His email address is ingat001@odu.edu