

Progress in Perfusion Imaging with EIT

Steffen Leonhardt

Philips Chair for Medical Information Technology , Helmholtz Institute for Biomedical Engineering , RWTH Aachen University
Pauwelsstr. 20, D-52074 Aachen, Germany, leonhardt@hia.rwth-aachen.de

Abstract: There is significant interest in the use of EIT to detect and monitor the changes induced by perfusion, however, such measurement presents various technical difficulties. This talk focuses on recent progress in perfusion imaging with EIT.

Perfusion Imaging with EIT

Electrical Impedance Tomography (EIT) shows clinical promise for its ability to image air and fluid flows in the thorax. Perfusion-related changes reflect the behaviour of the cardiovascular system, and thus can convey many clinically important variables for patient management.

Since perfusion-related changes in thoracic impedance are much smaller than the impedance changes induced by ventilation, it is much more difficult to use electrical impedance tomography to extract information on stroke volume (SV), cardiac output (CO), or lung perfusion. In order to use the cardiac-related impedance information provided by EIT to quantify cardiac output and lung perfusion, several approaches have been presented in the literature, including a.) Separation of cardiac- and ventilation-related EIT signals based of frequency-domain filtering, b.) ECG gating, c.) Apnea methods, d.) Use of contrast agents and e.) Separation based on principal component analysis. After the overview, the talk will focus on recent results obtained from pig trials by using our PCA-based separation method, as soon available in [1]. One aspect here will be mixed-models analysis versus trend-monitoring.

In order to provide a background for the reader interested in further exploring the literature on perfusion imaging with EIT, we provide a selection of relevant references [2]–[17].

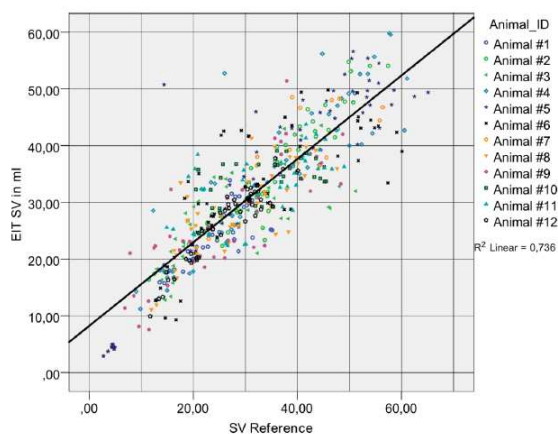


Figure 1: Overall mixed-models-correlation ($r = 0.85$, $r^2 = 0.736$) for SV estimation using PCA-separated EIT information and transthoracic thermodilution as a reference. To achieve this result, SV_EIT data had to be calibrated against SV_TTD in each single maneuver. From [1].

References

- [1] R. Pikkemaat, S. Lundin, O. Stenqvist, S. Leonhardt, (2014) "Recent advances in and limitations of cardiac output monitoring by means of electrical impedance tomography", *Anesthesia & Analgesia*, in print.
- [2] Borges JB, Suarez-Sipmann F, Bohm SH, Tusman G, Melo A, Maripuu E, Sandstrom M, Park M, Costa EL, Hedenstierna G, Amato M (2012). Regional lung perfusion estimated by electrical impedance tomography in a piglet model of lung collapse. *J Appl Physiol* 112:225–236.
- [3] Carlisle HR, Armstrong RK, Davis PG, Schibler A, Frerichs I, Tingay DG (2010). Regional distribution of blood volume within the preterm infant thorax during synchronised mechanical ventilation. *Intensive Care Med* 36:2101–2108.
- [4] Deibele J, Luepschen H, Leonhardt S (2008). Dynamic separation of pulmonary and cardiac changes in electrical impedance tomography. *Physiol Meas* 29:1–14.
- [5] Eyueboglu B, Brown B (1988). Methods of cardiac gating applied potential tomography. *Clin Phys Meas* 9:43–48.
- [6] Fagerberg A, Stenqvist O, Aneman A (2009). Monitoring pulmonary perfusion by electrical impedance tomography: an evaluation in a pig model. *Acta Anaesthesiol Scand* 53:152–158.
- [7] Fagerberg A, Stenqvist O, Aneman A (2009). Electrical impedance tomography applied to assess matching of pulmonary ventilation and perfusion in a porcine experimental model. *Crit Care* 13:R34.
- [8] Frerichs I, Pulletz S, Elke G, Reifferscheid F, Schadler D, Scholz J, Weiler N (2009). Assessment of changes in distribution of lung perfusion by electrical impedance tomography. *Respiration* 77:282–291.
- [9] Kerrouche N, McLeod C, Lionheart W (2001). Time series of EIT chest images using singular value decomposition and Fourier transform. *Physiol Meas* 22:147–157.
- [10] Leathard AD, Brown BH, Campbell J, Zhang F, Morice AH, Tayler D (1994). A comparison of ventilatory and cardiac related changes in EIT images of normal human lungs and of lungs with pulmonary emboli. *Physiol Meas* 15:137–146.
- [11] Luepschen H, Muders T, Pikkemaat R, Meier T, Putensen C, Leonhardt S (2010). Bestimmung der Lungenperfusion mittels Elektrischer Impedanztomographie. Rostock, Germany, pp 5–8 (in German).
- [12] Smit HJ, Handoko ML, Vonk Noordegraaf A, Faes TJ, Postmus PE, de Vries PM, Boonstra A (2003). Electrical impedance tomography to measure pulmonary perfusion: is the reproducibility high enough for clinical practice? *Physiol Meas* 24:491–499.
- [13] Smit HJ, Vonk-Noordegraaf A, Marcus JT, Boonstra A, de Vries PM, Postmus PE (2004). Determinants of pulmonary perfusion measured by electrical impedance tomography. *Eur J Appl Physiol* 92:45–49.
- [14] Smit HJ, Vonk-Noordegraaf A, Boonstra A, de Vries PM, Postmus PE (2006). Assessment of the pulmonary volume pulse in idiopathic pulmonary arterial hypertension by means of electrical impedance tomography. *Respiration* 73:597–602.
- [15] Vonk-Noordegraaf A, Kunst PW, Janse A, Marcus JT, Postmus PE, Faes TJ, de Vries PM (1998). Pulmonary perfusion measured by means of electrical impedance tomography. *Physiol Meas* 19:263–273.
- [16] Vonk-Noordegraaf A, van Wolferen SA, Marcus JT, Boonstra A, Postmus PE, Peeters JW, Peacock AJ (2005). Noninvasive assessment and monitoring of pulmonary circulation. *Europ Respir J* 25:758–766.
- [17] Zadehkoochak M, Blott BH, Hames TK, George RF (1992). Pulmonary perfusion and ventricular ejection imaging by frequency domain filtering of EIT images. *Clin Phys Meas* 13:191–196.